


NPN/PNP Silicon Epitaxial Planar Digital Transistor
for switching and interface circuit and drivecircuit applications

Features

- Transistors with different polarity and built-in bias resistors R1 and R2
- Simplification of circuit design
- Reduces number of components and board space

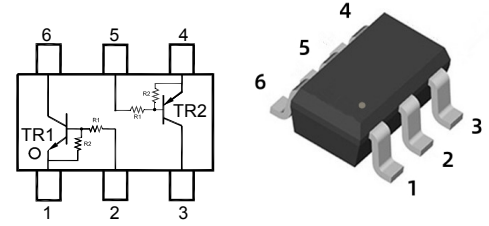

1. Emitter 2. Base 3. Collector
4. Emitter 5. Base 6. Collector

■ **Simplified outline(SOT-363)**

Absolute Maximum Ratings at Ta = 25°C (TR1)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	50	V
Collector Emitter Voltage	V_{CEO}	50	V
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	100	mA

Absolute Maximum Ratings at Ta = 25°C (TR2)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	50	V
Collector Emitter Voltage	$-V_{CEO}$	50	V
Emitter Base Voltage	$-V_{EBO}$	6	V
Collector Current	$-I_C$	100	mA

Absolute Maximum Ratings at Ta = 25°C (TR1 and TR2)

Parameter	Symbol	Value	Unit
Total Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 150	°C

Characteristics at Ta = 25°C (TR1:NPN)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 10\text{ mA}$	h_{FE}	80	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50\text{ V}$	I_{CBO}	-	-	100	nA
Collector Emitter Cutoff Current at $V_{CE} = 50\text{ V}$	I_{CEO}	-	-	500	nA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$	I_{EBO}	0.081	-	0.15	mA
Collector Emitter Saturation Voltage at $I_C = 5\text{ mA}$, $I_B = 0.25\text{ mA}$	V_{CESat}	-	-	0.3	V
Input Voltage (OFF) at $V_{CE} = 5\text{ V}$, $I_C = 100\text{ }\mu\text{A}$	$V_{I(OFF)}$	0.5	-	1	V
Input Voltage (ON) at $V_{CE} = 0.2\text{ V}$, $I_C = 5\text{ mA}$	$V_{I(ON)}$	0.7	-	1.8	V
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$, $I_C = 5\text{ mA}$, $f = 100\text{ MHz}$	f_T	-	250	-	MHz




Characteristics at Ta = 25°C (TR2:PNP)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $-V_{CE} = 5\text{ V}$, $-I_C = 10\text{ mA}$	h_{FE}	80	-	-	-
Collector Base Cutoff Current at $-V_{CB} = 50\text{ V}$	$-I_{CBO}$	-	-	100	nA
Collector Emitter Cutoff Current at $-V_{CE} = 50\text{ V}$	$-I_{CEO}$	-	-	500	nA
Emitter Base Cutoff Current at $-V_{EB} = 6\text{ V}$	$-I_{EBO}$	0.081	-	0.15	mA
Collector Emitter Saturation Voltage at $-I_C = 5\text{ mA}$, $-I_B = 0.25\text{ mA}$	$-V_{CESat}$	-	-	0.3	V
Input Voltage (OFF) at $-V_{CE} = 5\text{ V}$, $-I_C = 100\text{ }\mu\text{A}$	$-V_{I(OFF)}$	0.5	-	1	V
Input Voltage (ON) at $-V_{CE} = 0.2\text{ V}$, $-I_C = 5\text{ mA}$	$-V_{I(ON)}$	0.7	-	1.8	V
Gain Bandwidth Product at $-V_{CE} = 10\text{ V}$, $-I_C = 5\text{ mA}$, $f = 100\text{ MHz}$	f_T	-	200	-	MHz




Characteristics at Ta = 25°C (TR1 and TR2)

Input Resistance	R_1	7	10	13	K Ω
Resistance Ratio	R_1/R_2	0.191	0.213	0.232	-

Typical Characteristics TR1

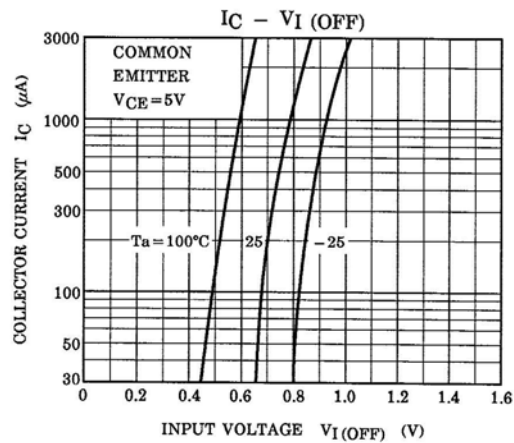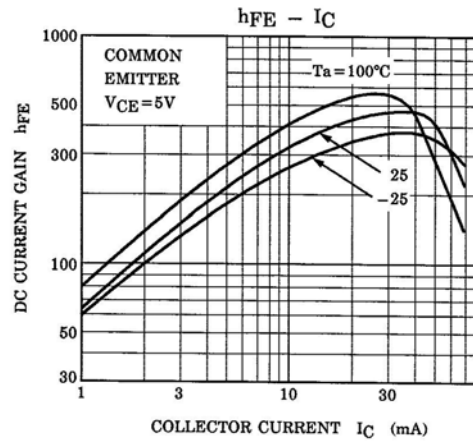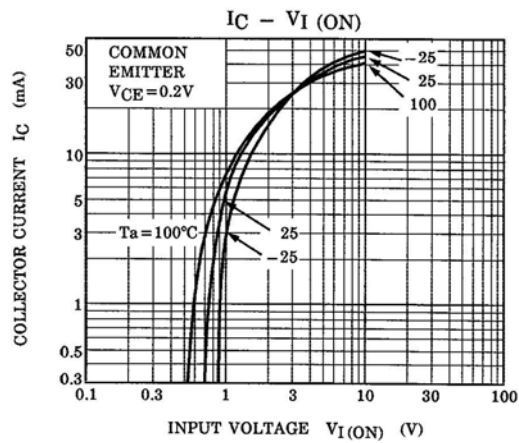

Typical Characteristics TR2

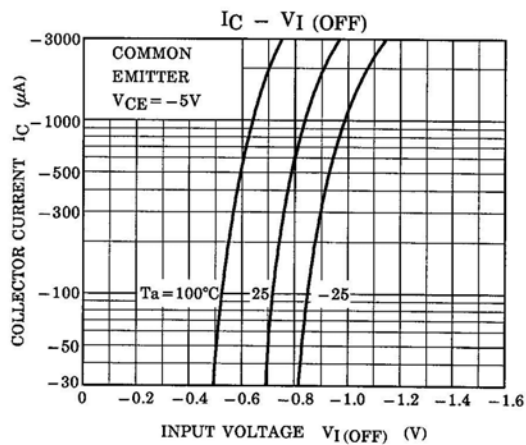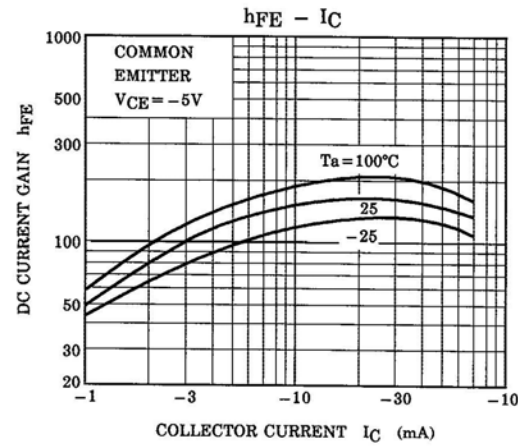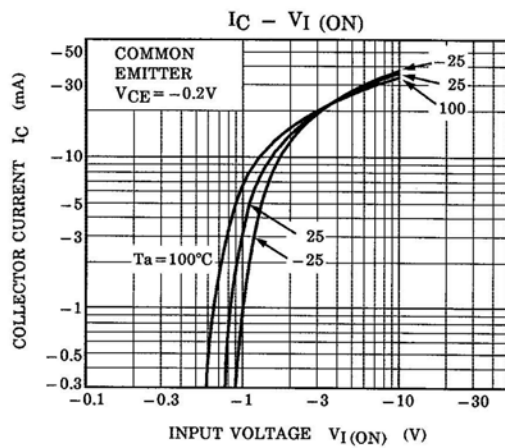

Ordering information


Package	Packing Description	Packing Quantity
SOT-363	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOT-363

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	-	0.1	-	3.94
bp	0.20	0.30	7.87	11.81
c	0.10	0.25	3.94	9.84
D	1.8	2.2	70.87	86.61
E	1.15	1.35	45.28	53.15
e	1.3		51.18	
e1	0.65		25.6	
HE	2.0	2.2	78.74	86.6
Lp	0.15	0.45	5.90	17.71
Q	0.15	0.25	5.90	9.84
v	0.2		7.78	
w	0.2		7.78	
y	0.1		3.94	

The recommended mounting pad size

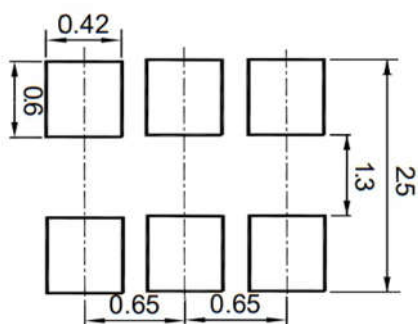

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.