


NPN 100mA Digital Transistor

Features

- Built-In Biasing Resistors, $R_1 = 10k\Omega$, $R_2 = 47k\Omega$
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors.
- Only the on/off conditions need to be set for operation, making the circuit design easy.

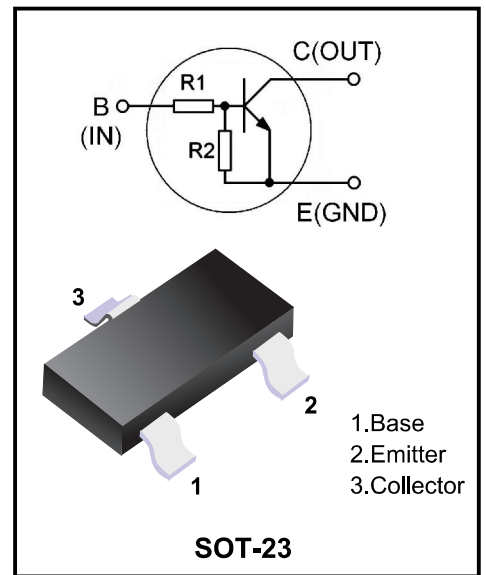

Marking Code	
BCR135	64

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Supply voltage	V_{CBO}	50	V
Input voltage	V_{CEO}	50	V
Input forward voltage	V_{IF}	40	V
Input reverse voltage	V_{IR}	6	V
Output current	I_C	100	mA
Total power dissipation	P_{tot}	200	mA
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-56~150	$^\circ\text{C}$

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction ambient	R_{thjA}	240	K/W
Junction soldering point	R_{thjA}	105	K/W

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV_{CBO}	$I_C=10\mu A, I_E=0$	50			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C=100\mu A, I_B=0$	50			V
Collector-base cutoff current	I_{CBO}	$V_{CB}=40V$			100	nA
Emitter-base cutoff current	I_{EBO}	$V_{EB}=6V$			167	μA
DC current gain	h_{FE}	$V_{CE}=5V, I_O=5mA$	70			
Collector-emitter saturation voltage*	$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$			0.3	V
Input voltage	$V_{I(off)}$	$V_{CE}=5V, I_O=100\mu A$	0.5		1	V
	$V_{I(on)}$	$V_{CE}=0.3V, I_O=2mA$	0.5		1.4	V
Input resistor	R_1		7	10	13	K Ω
Resistor ratio	R_1/R_2		0.19	.21	.24	
Transition frequency	f_T	$V_{CE}=10V, I_E=10mA, f=100MHz$		150		MHz
Collector-base capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$		3		pF

* Pulse test: $t < 300\mu s; D < 2\%$

Typical Characteristics

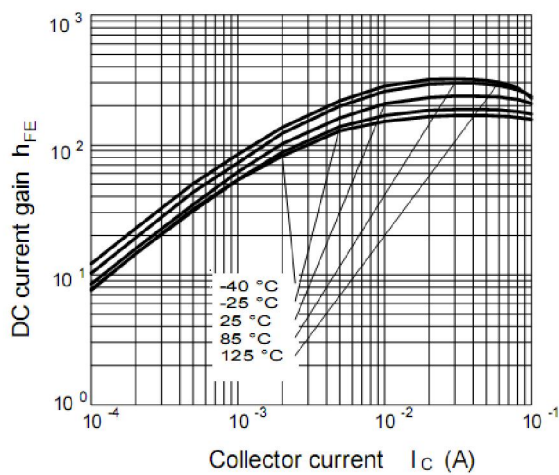


Figure 1. DC current gain

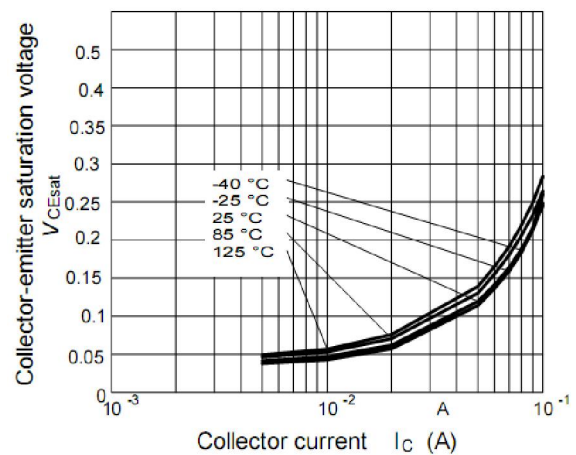


Figure2. Collector-emitter saturation voltage

Typical Characteristics

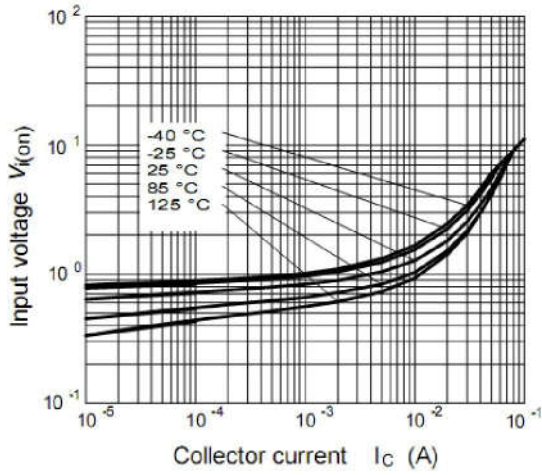


Figure 3. Input voltage vs. output current (ON characteristics)

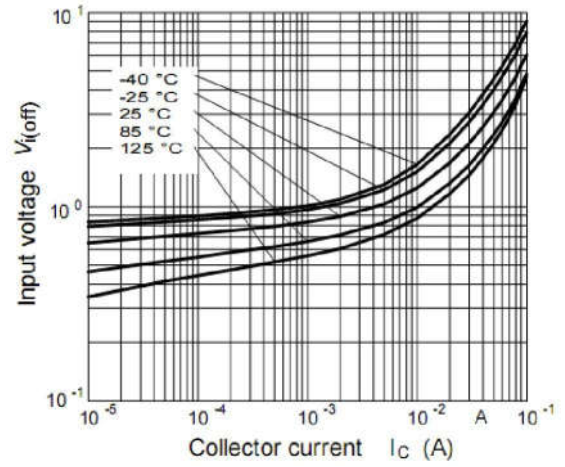


Figure 4. Output current vs. input voltage (OFF characteristics)

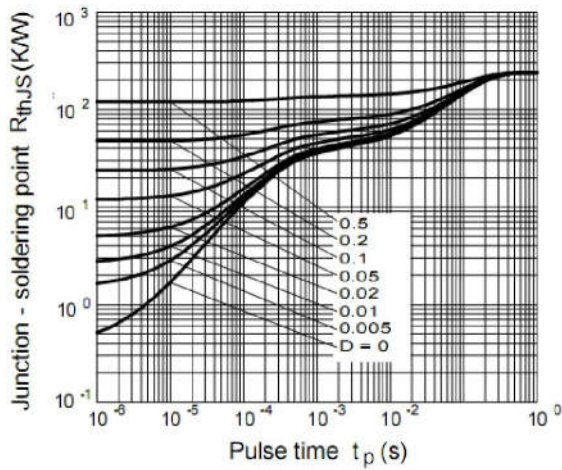


Figure 5. Permissible Pulse Load

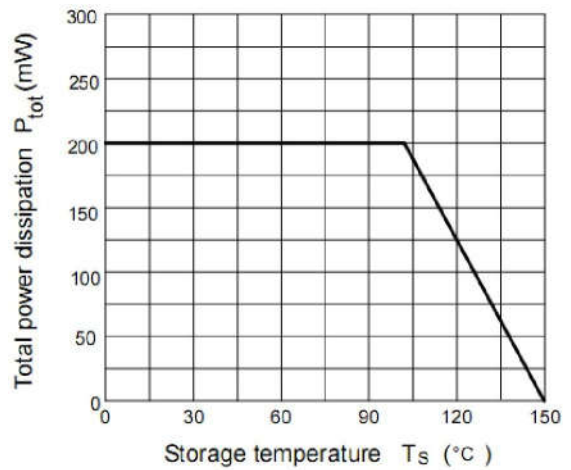


Figure 5. Total power dissipation

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-23	Tape/Reel,7"reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-23

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.15	35	45
A1	0.1		3.9	
bp	0.38	0.48	15	19
C	0.09	0.15	3.54	5.9
D	2.8	3.0	110	118
E	1.2	1.4	47	55
e	1.9		75	
e1	0.95		37	
HE	2.1	2.55	83	100
Lp	0.15	0.45	5.9	18
Q	0.45	0.55	18	22
v	0.2		7.9	
W	0.1		4	

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.