


■ Silicon Schottky Barrier Diode

■ Features

- Metal silicon unction, maority carrier conduction
- Ideal for used in detection or for switching on the radio, TV, etc.

Pinning

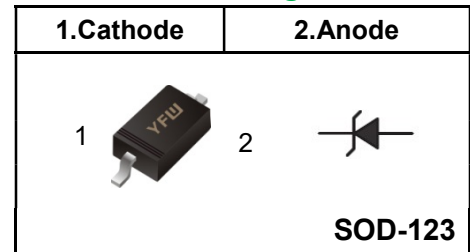

Marking Code

1N60PW	FM
---------------	-----------

■ Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	1N60PW	Units
Peak Reverse Voltage	V_{RM}	45	V
Reverse Voltage	V_R	20	V
Average Rectified Output Current	I_O	50	mA
Peak Forward Current	I_{FM}	150	mA
Surge Forward Current	I_{surge}	500	mA
Forward Current at $V_F=1V$	I_F	4	mA
Reverse Current at $V_R=10V$	I_R	50	uA
Total Capacitance at $f=1MHz, V=-1V$	C_{tot}	1	pF
Rectification efficiency at $V_i = 2 V_{RMS}, R = 5 K\Omega$	η	55	%
Junction Temperature	T_j	125	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

Fig.1 Forward Characteristics


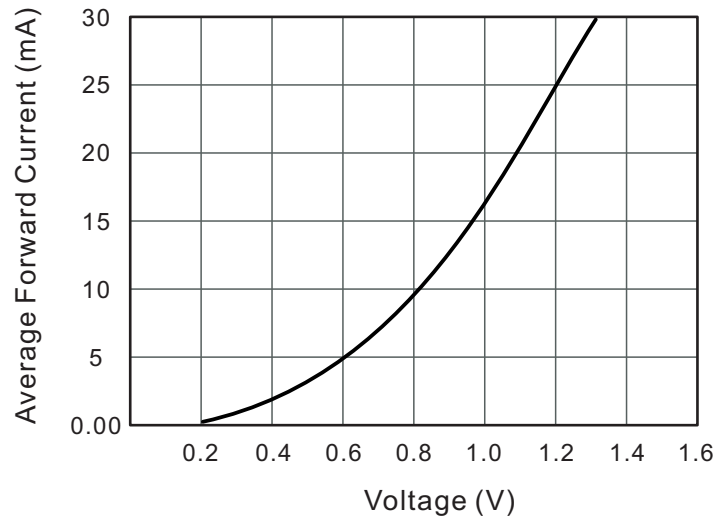


Fig.2 Typical Reverse Characteristics

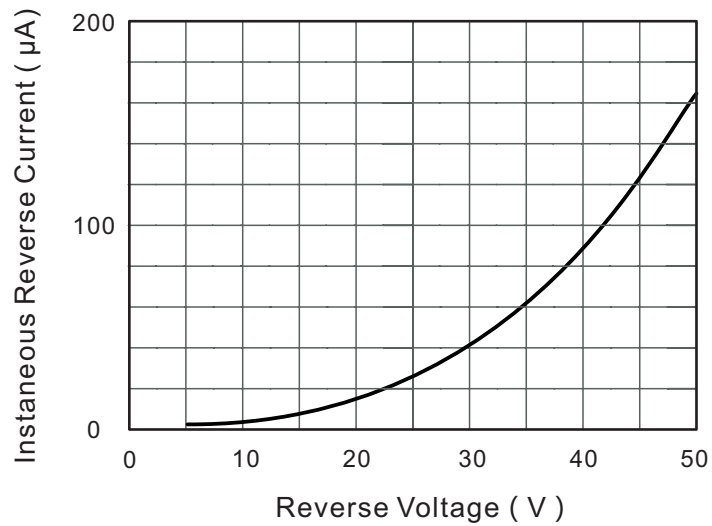

Ordering information


Package	Packing Description	Packing Quantity
SOD-123	Tape/Reel,7"reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOD-123

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.3	35	51
C	0.09	0.22	3.5	8.7
D	1.5	1.8	59	71
E	2.5	2.8	98	110
E1	3.6	3.9	142	154
b	0.5	0.7	20	28
L1	0.25	0.45	10	18
A1	-	0.2	-	8
∠	9°			

The recommended mounting pad size

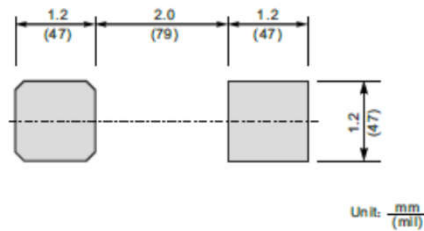

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.