

General purpose PIN diode

FEATURES

- ♦Two elements in series configuration in a small SMD plastic package
- ♦Low diode capacitance
- ♦Low diode forward resistance.


APPLICATIONS

- ♦General RF applications.

DESCRIPTION

- ♦Two planar PIN diodes in series configuration in an SOT-323 small SMD plastic package.

Pinning

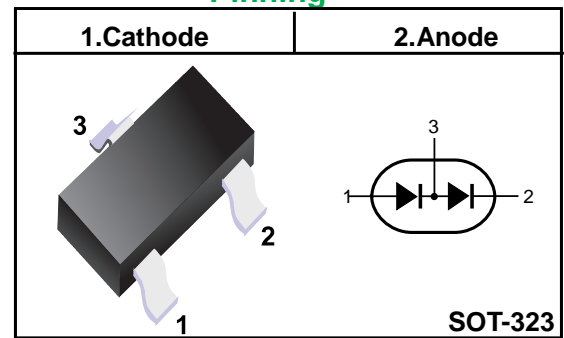

Marking Code

BAP50-04W	6W
------------------	-----------

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
Per diode					
V_R	continuous reverse voltage		–	50	V
I_F	continuous forward current		–	50	mA
P_{tot}	total power dissipation	$T_s = 90\text{ °C}$	–	240	mW
T_{stg}	storage temperature		–65	+150	°C
T_j	junction temperature		–65	+150	°C

ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ °C}$ unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Per diode						
V_F	forward voltage	$I_F = 50\text{ mA}$	–	0.95	1.1	V
V_R	reverse voltage	$I_R = 10\text{ }\mu\text{A}$	50	–	–	V
I_R	reverse current	$V_R = 50\text{ V}$	–	–	100	nA
C_d	diode capacitance	$V_R = 0; f = 1\text{ MHz}$	–	0.45	–	pF
		$V_R = 1\text{ V}; f = 1\text{ MHz}$	–	0.35	0.6	pF
		$V_R = 5\text{ V}; f = 1\text{ MHz}$	–	0.30	0.5	pF
r_D	diode forward resistance	$I_F = 0.5\text{ mA}; f = 100\text{ MHz}; \text{note 1}$	–	25	40	Ω
		$I_F = 1\text{ mA}; f = 100\text{ MHz}; \text{note 1}$	–	14	25	Ω
		$I_F = 10\text{ mA}; f = 100\text{ MHz}; \text{note 1}$	–	3	5	Ω
τ_L	charge carrier life time	when switched from $I_F = 10\text{ mA}$ to $I_R = 6\text{ mA}$; $R_L = 100\text{ }\Omega$; measured at $I_R = 3\text{ mA}$	–	1.05	–	μs
L_S	series inductance	$I_F = 10\text{ mA}; f = 100\text{ MHz}$	–	1.60	–	nH

Note 1. Guaranteed on AQL basis: inspection level S4, AQL1.0.

THERMAL CHARACTERISTICS


SYMBOL	PARAMETER	VALUE	UNIT
R_{th-j-s}	thermal resistance from junction to soldering point	250	K/W

Typical Characteristics

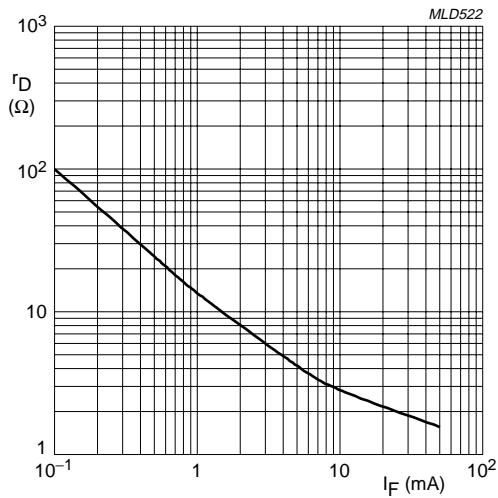


f = 100 MHz; T_j = 25 °C.

Fig.2 Forward resistance as a function of forward current; typical values.

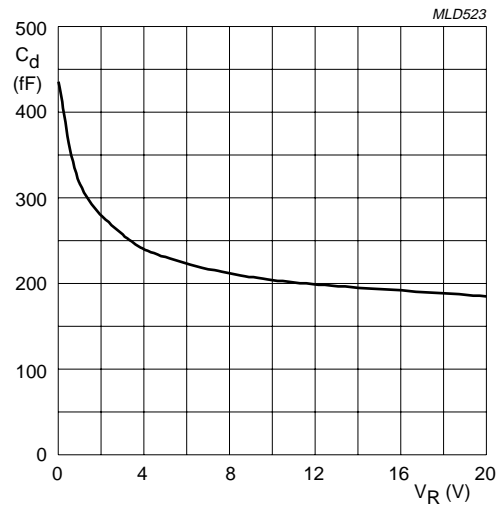

f = 1 MHz; T_j = 25 °C.


Fig.3 Diode capacitance as a function of reverse voltage; typical values.

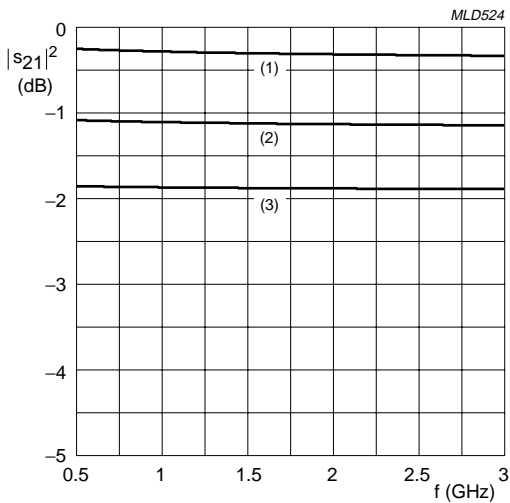

(1) I_F = 10 mA. (2) I_F = 1 mA. (3) I_F = 0.5 mA.

Diode inserted in series with a 50 Ω stripline circuit and biased via the analyzer Tee network.
T_{amb} = 25 °C.

Fig.4 Insertion loss ($|s_{21}|^2$) of the diode in on-state as a function of frequency; typical values.

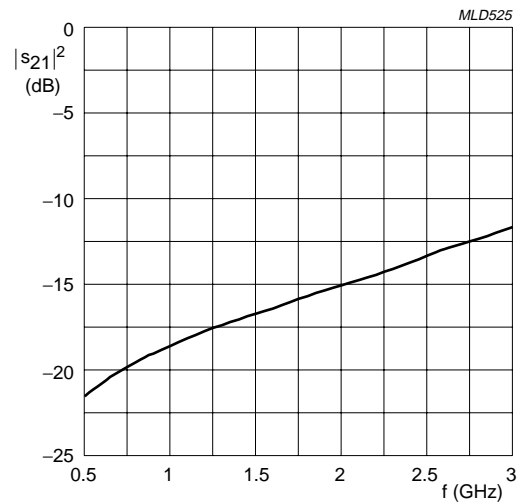

Diode zero biased and inserted in series with a 50 Ω stripline circuit.
T_{amb} = 25 °C.

Fig.5 Isolation ($|s_{21}|^2$) of the diode in off-state as a function of frequency; typical values.

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-323	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-323

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	0.1		4	
bp	0.3	0.4	12	16
C	0.10	0.25	4	10
D	1.8	2.2	71	87
E	1.15	1.35	45	53
E	1.3		51	
E1	0.65		26	
HE	2.0	2.2	79	87
Lp	0.15	0.45	6	18
Q	0.13	0.23	5.1	9
v	0.2		8	
W	0.2		8	

The recommended mounting pad size

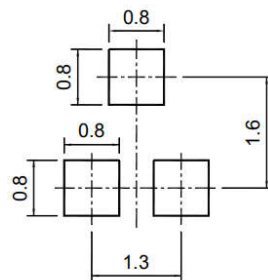

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.