


PNP Transistors

Features

- Low $V_{CE(sat)}$.
 $V_{CE(sat)} = -0.35V$ (Typ.)
 $(I_C/I_B = -4A / -0.1A)$
- Excellent DC current gain
- Epitaxial planar type
- PNP silicon transistor

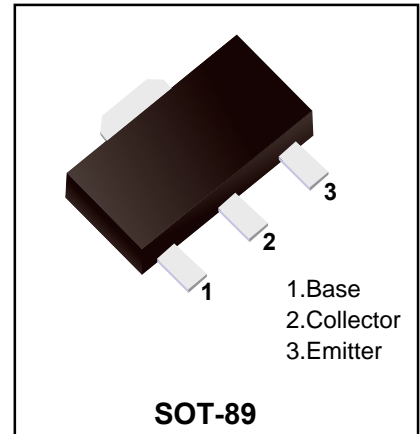

Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	-30	V
Collector-emitter voltage	V_{CEO}	-20	V
Emitter-base voltage	V_{EBO}	-6	V
Collector current	I_C	-5	A
Collector current(Pulse)	I_{CP}^*	-10	A
Collector power dissipation	P_C	0.5	W
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55 to +150	°C

* Single pulse, $P_w=10ms$

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C=-50 \mu A$	-30			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C=-1mA$	-20			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E=-50 \mu A$	-6			V
Collector cutoff current	I_{CBO}	$V_{CB}=-20V$			-0.5	μA
Emitter cutoff current	I_{EBO}	$V_{EB}=-5V$			-0.5	μA
DC current transfer ratio	$V_{CE(sat)}$	$I_C=-4A, I_B=-0.1A$		0.35	-1	V
Collector-emitter saturation voltage	h_{FE}	$V_{CE}=-2V, I_C=-0.5A$	82		390	
Output capacitance	C_{ob}	$V_{CE}=-6V, I_E=50mA, f=30MHz$		120		pF
Transition frequency	f_T	$V_{CB}=-20V, I_E=0A, f=1MHz$		60		MHz

h_{FE} Classification

Type	2SB1386-P	2SB1386-Q	2SB1386-R
Range	82-180	120-270	180-390
Marking	BHP*	BHQ*	BHR*

Typical Characteristics

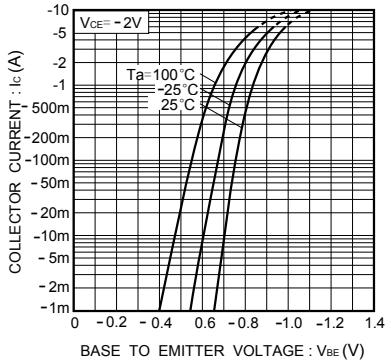


Fig.1 Grounded emitter propagation characteristics

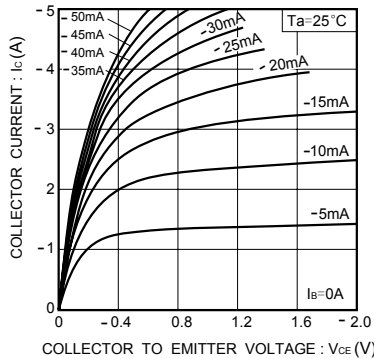


Fig.2 Grounded emitter output characteristics

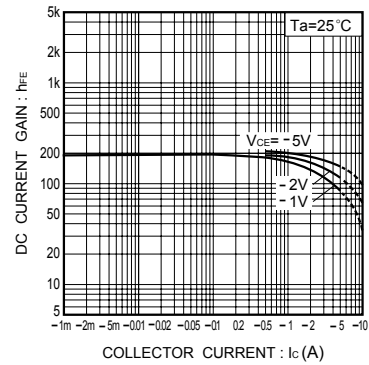


Fig.3 DC current gain vs. collector current (I)

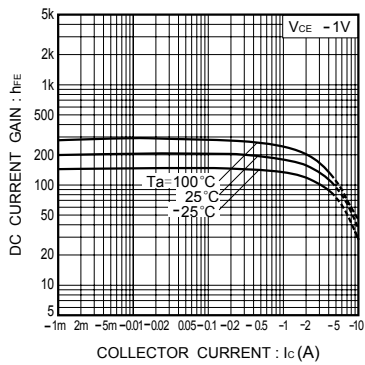


Fig.4 DC current gain vs. collector current (II)

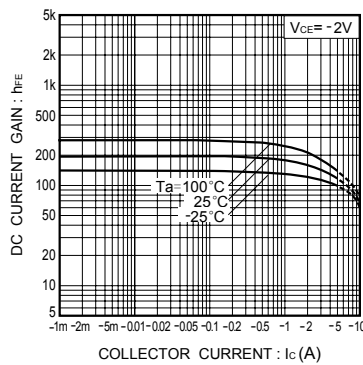


Fig.5 DC current gain vs. collector current (III)

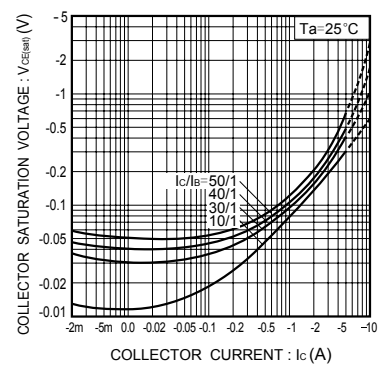


Fig.6 Collector-emitter saturation voltage vs. collector current (I)

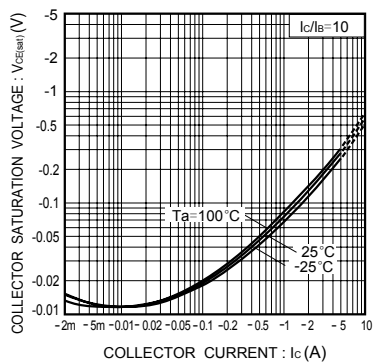


Fig.7 Collector-emitter saturation voltage vs. collector current (II)

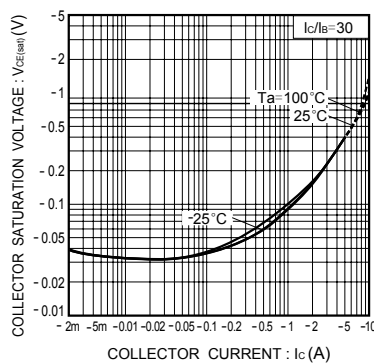


Fig.8 Collector-emitter saturation voltage vs. collector current (III)

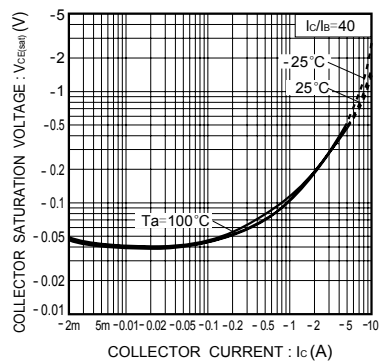


Fig.9 Collector-emitter saturation voltage vs. collector current (IV)

Typical Characteristics

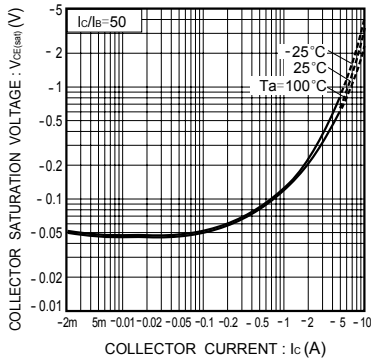


Fig.10 Collector-emitter saturation voltage vs. collector current (V)

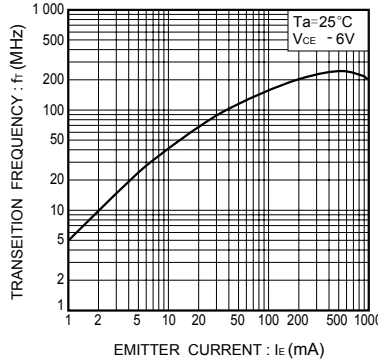


Fig.11 Gain bandwidth product vs. emitter current

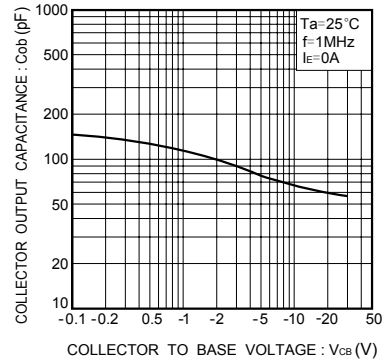


Fig.12 Collector output capacitance vs. collector-base voltage

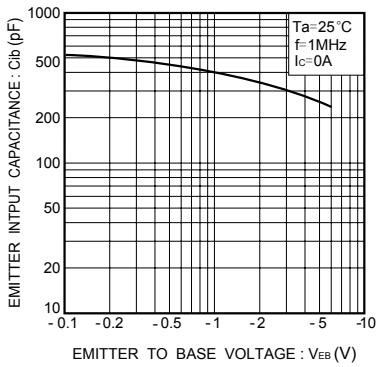


Fig.13 Emitter input capacitance vs. emitter-base voltage

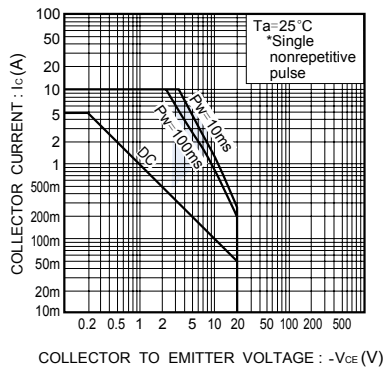


Fig.14 Safe operation area

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel,7"reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

The recommended mounting pad size

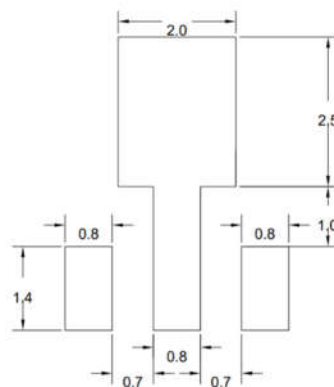

UNIT:MM

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.