


**NPN Plastic-Encapsulate Transistors**

**Medium Power Linear and Switching Applications**

†Complement to BD136, BD138 and BD140 respectively

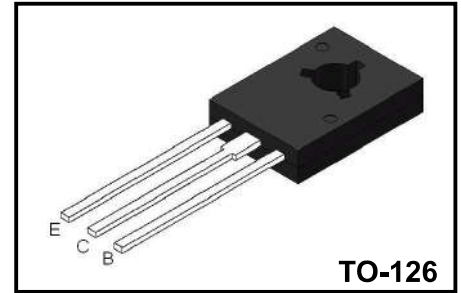

**TO-126**

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Value			Unit
		BD135	BD137	BD139	
Collector-Base Voltage	$BV_{CBO}$	45	60	80	V
Collector-Emitter Voltage	$BV_{CEO}$	45	60	80	V
Emitter-Base Voltage	$BV_{EBO}$	5			V
Collector Current	$I_C$	1.5			A
Collector Power Dissipation	$P_C$	12.5			W
Junction Temperature	$T_j$	150			°C
Storage Temperature	$T_{stg}$	-55~150			°C

**Electrical Characteristics (Ta=25°C)**

Parameter		Symbol	Conditions	Value			Unit
				Min	Typ	Max	
Collector-base breakdown voltage	BD135 BD137 BD139	$BV_{CBO}$	$I_C = 100\mu A, I_E = 0$	45 60 80			V
Collector-emitter breakdown voltage	BD135 BD137 BD139	$BV_{CEO}$	$I_C = 10mA, I_B = 0$	45 60 80			V
Emitter-base breakdown voltage		$BV_{EBO}$	$I_E = 100\mu A, I_C = 0$	5			V
Collector cut-off current	BD135 BD137 BD139	$I_{CBO}$	$V_{CB} = 30V, I_E = 0$			100	$\mu A$
Emitter cut-off current		$I_{EBO}$	$V_{EB} = 5V, I_C = 0$			10	$\mu A$
DC current gain	ALL DEVICE ALL DEVICE BD135 BD137, BD139	$h_{FE}$	$V_{CE} = 2V, I_C = 5mA$ $V_{CE} = 2V, I_C = 0.5A$ $V_{CE} = 2V, I_C = 150mA$	25 25 40 40		250 160	
Collector-emitter saturation voltage		$V_{CE(SAT)}$	$I_C = 500mA, I_B = 50mA$			0.5	V
Base -emitter saturation voltage		$V_{BE(ON)}$	$V_{CE} = 2V, I_C = 0.5A$			1	V

**$h_{FE}$  Classification**

Classification	6	10	16
Range	40-100	63-160	100-250


**Ordering information**

Package	Packing Description	Base Quantity
TO-126	Bulk	500pcs/Bag

**Package Dimensions**

**TO-126**

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.40	2.80	0.094	0.110
A1	1.00	1.40	0.039	0.055
b	0.66	0.86	0.026	0.034
b1	1.17	1.37	0.046	0.054
c	0.40	0.60	0.016	0.024
D	7.30	7.70	0.287	0.303
E	10.60	11.00	0.417	0.433
e	2.25	2.33	0.089	0.092
e1	4.50	4.66	0.177	0.183
L	14.00	15.00	0.551	0.591
L1	1.90	2.50	0.075	0.098
Φ	3.10	3.30	0.122	0.130

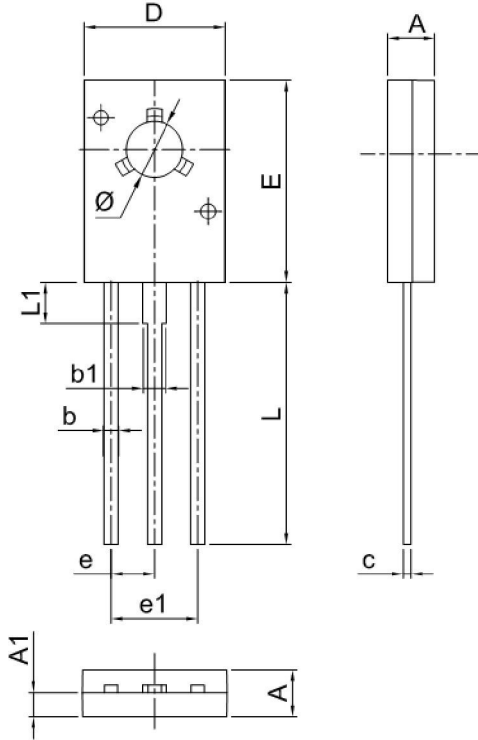

## Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.