


Plastic-Encapsulate Transistors

DUAL TRANSISTOR (NPN+PNP)

FEATURES

- ♦Epitaxial Die Construction
- ♦Two isolated NPN/PNP(BC846W+BC856W)
Transistors in one package

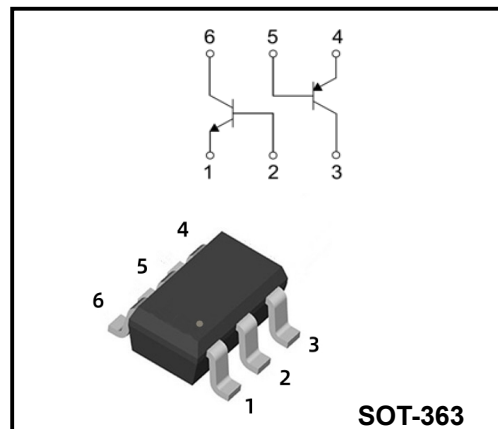

Marking Code

BC846PN

BB

MAXIMUM RATINGS TR1 (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	65	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current –Continuous	0.1	A
P_C	Collector Power Dissipation	200	mW
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55-150	°C

CHARACTERISTICS of TR1 (NPN Transistor) (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	80			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	65			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=1\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=30V, I_E=0$			15	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			15	nA
DC current gain	h_{FE}	$V_{CE}=5V, I_C=2mA$	200		450	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$			0.25	V
	$V_{CE(sat)}$	$I_C=100mA, I_B=5mA$			0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=10mA, I_B=0.5mA$		0.7		V
	$V_{BE(sat)}$	$I_C=100mA, I_B=5mA$		0.9		V
Base-emitter voltage	$V_{BE(on)}$	$V_{CE}=5V, I_C=2mA$	0.58		0.7	V
	$V_{BE(on)}$	$V_{CE}=5V, I_C=10mA$			0.72	V
Collector output capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$			6.0	pF
Transition frequency	f_T	$V_{CE}=5V, I_C=10mA, f=100MHz$	100			MHz
Noise figure	NF	$V_{CE}=5V, I_C=0.2mA, f=1kHz, R_g=2K\Omega, \Delta f=200Hz$			10	dB

MAXIMUM RATINGS TR2 (Ta=25°C unless otherwise noted)









Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-65	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current –Continuous	-0.1	A
P_C	Collector Power Dissipation	200	mW
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55-150	°C

CHARACTERISTICS of TR2 (PNP Transistor) (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-80			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-65			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -1\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -30V, I_E = 0$			-15	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-15	nA
DC current gain	h_{FE1}	$V_{CE} = -5V, I_C = -2mA$	220		475	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$			-0.3	V
	$V_{CE(sat)}$	$I_C = -100mA, I_B = -5mA$			-0.65	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -10mA, I_B = -0.5mA$		-0.7		V
	$V_{BE(sat)}$	$I_C = -100mA, I_B = -5mA$			-0.95	V
Base-emitter voltage	$V_{BE(on)}$	$V_{CE} = -5V, I_C = -2mA$	-0.6		-0.75	V
	$V_{BE(on)}$	$V_{CE} = -5V, I_C = -10mA$			-0.82	V
Collector output capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$			4.5	pF
Transition frequency	f_T	$V_{CE} = -5V, I_C = -10mA, f = 100MHz$	100			MHz
Noise figure	NF	$V_{CE} = -5V, I_C = -0.2mA, f = 1kHz, R_g = 2K\Omega, \Delta f = 200Hz$			10	dB









Typical Characteristics

BC846PN/TR1

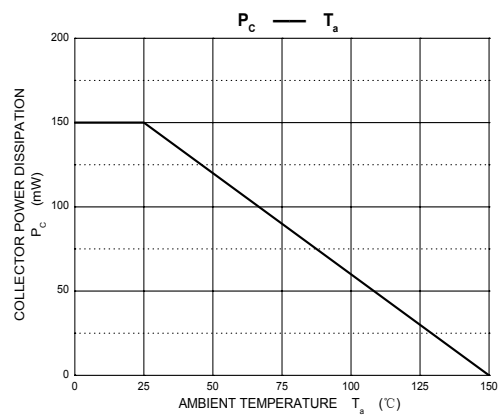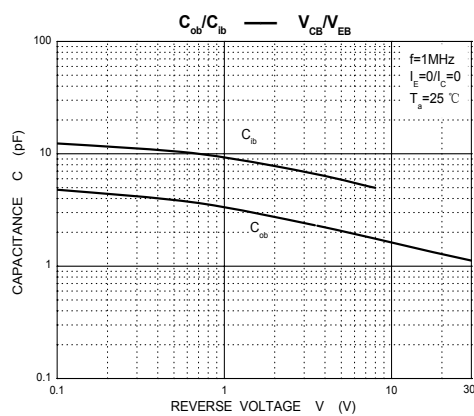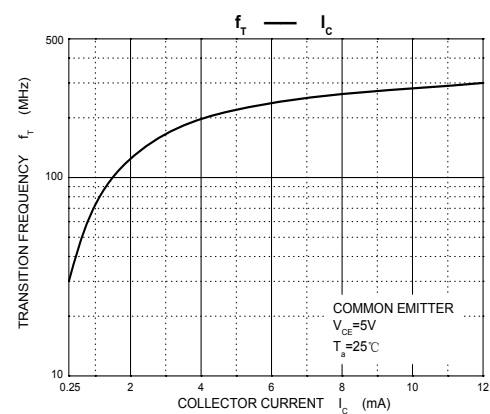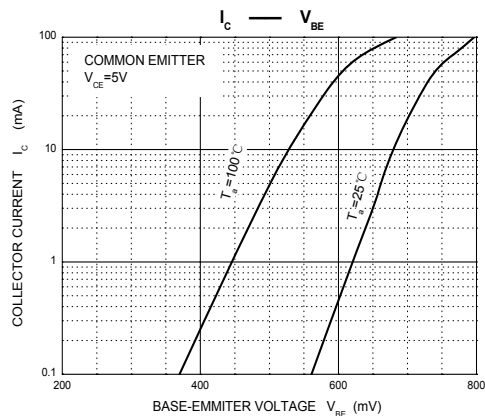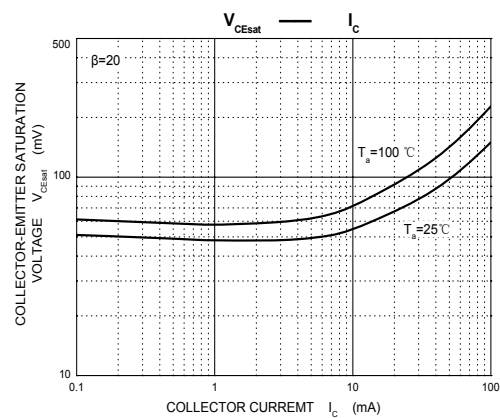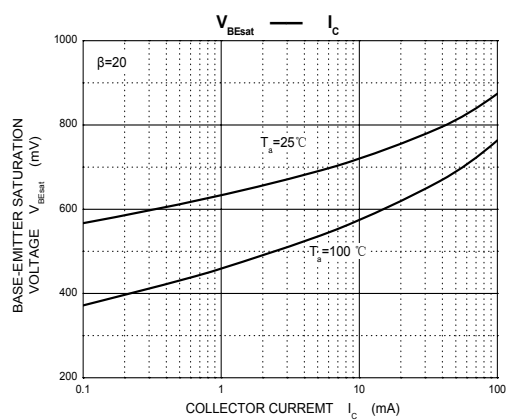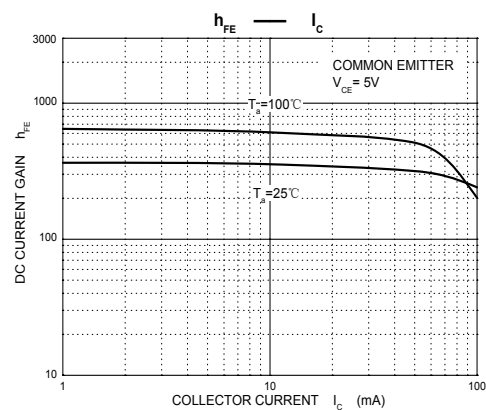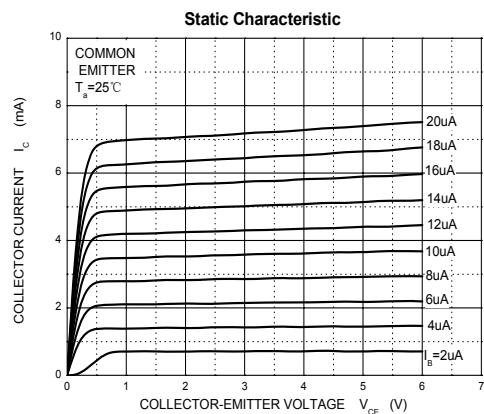

Typical Characteristics

BC846PN/TR2

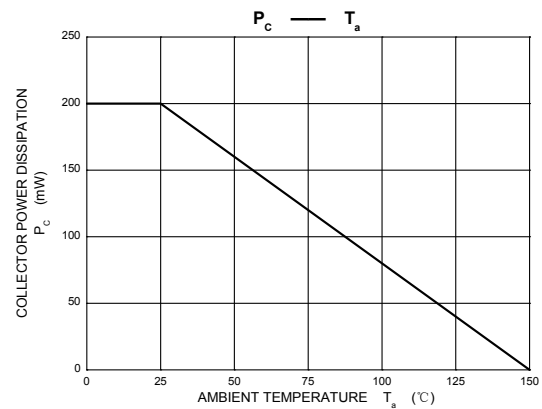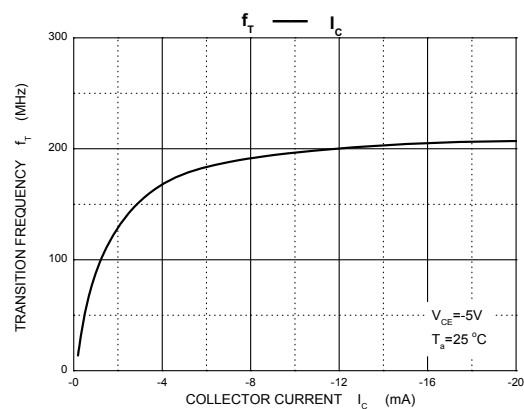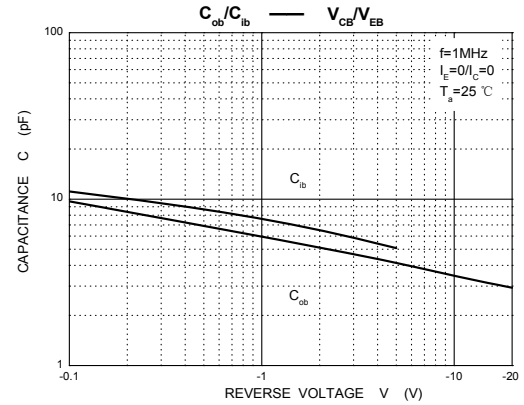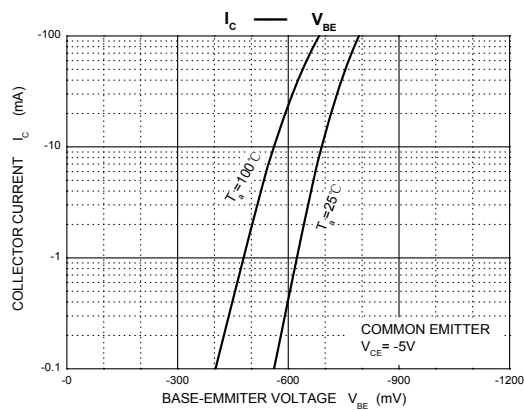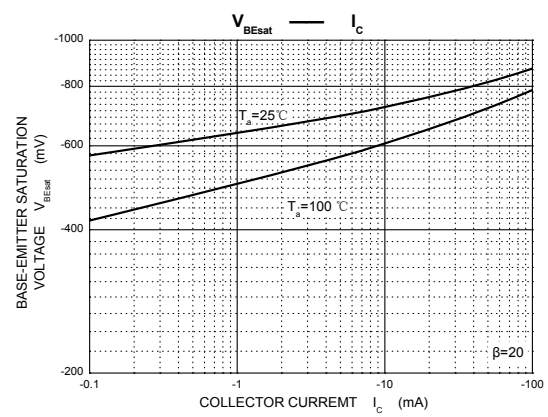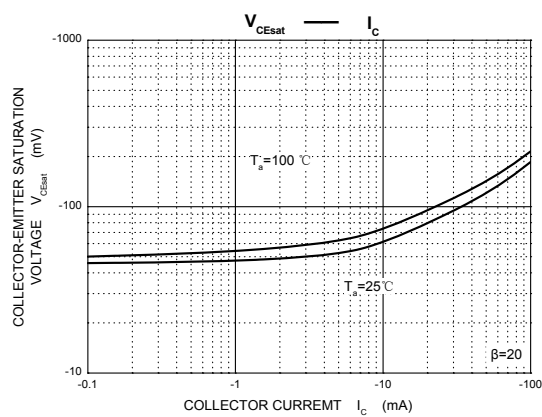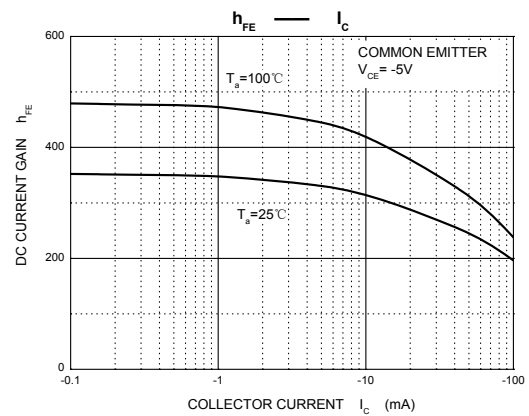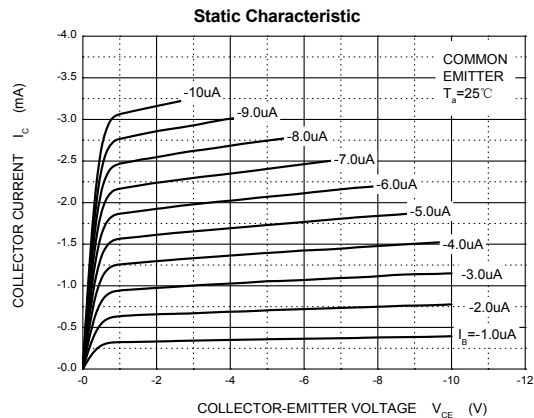

Ordering information


Package	Packing Description	Packing Quantity
SOT-363	Tape/Reel, 7" reel	3000PCS/Reel 120000PCS/Carton

Package Dimensions

SOT-363

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	-	0.1	-	3.94
bp	0.20	0.30	7.87	11.81
c	0.10	0.25	3.94	9.84
D	1.8	2.2	70.87	86.61
E	1.15	1.35	45.28	53.15
e	1.3		51.18	
e1	0.65		25.6	
HE	2.0	2.2	78.74	86.6
Lp	0.15	0.45	5.90	17.71
Q	0.15	0.25	5.90	9.84
v	0.2		7.78	
w	0.2		7.78	
y	0.1		3.94	

The recommended mounting pad size

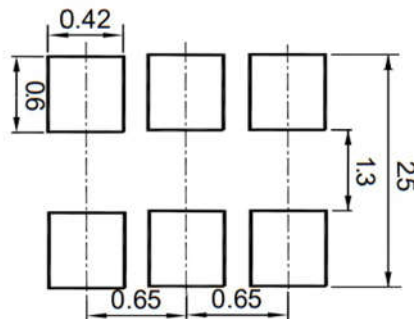

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.