


PNP Plastic-Encapsulate Transistors

Applications

- ◆Telephone Switching Circuit
- ◆Amplifier

Features

- ◆High Collector-Emitter Voltage : $BV_{CEO} = -150V$
- ◆High current gain

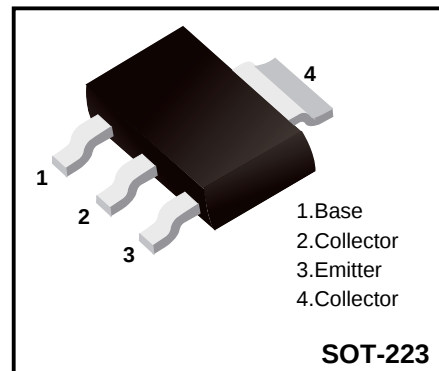

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	BV_{CBO}	-160	V
Collector-Emitter Voltage	BV_{CEO}	-150	V
Emitter-Base Voltage	BV_{EBO}	-5	V
Collector Current	I_C	-600	mA
Collector Power Dissipation	P_C	2	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	BV_{CBO}	$I_C = -100\mu A, I_E = 0$	-160			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = -1mA, I_B = 0$	-150			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = -100\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -120V, I_E = 0$			-50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -4V, I_C = 0$			-50	nA
DC current gain	h_{FE}	$V_{CE} = -5V, I_C = -1mA$	80			
		$V_{CE} = -5V, I_C = -10mA$	80		400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -50mA, I_B = -5mA$			-0.5	V
Base -emitter saturation voltage	$V_{BE(sat)}$	$I_C = -50mA, I_B = -5mA$			-1.0	V
Transition frequency	f_T	$V_{CE} = -10V, I_B = -10mA$	100			MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$			6	pF

Note: Pulse test: $PW < 300\mu s$, Duty Cycle $< 2\%$

h_{FE} Classification

Classification	YFW5401-A	YFW5401-B	YFW5401-C
Range	80~170	150~240	200~400

Typical Characteristics

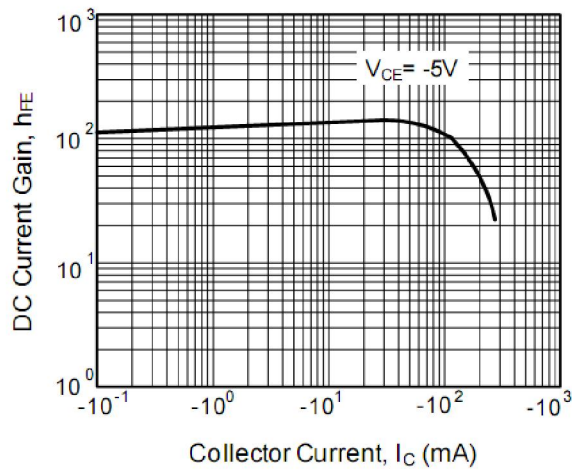


Figure 1. TDC Current Gain

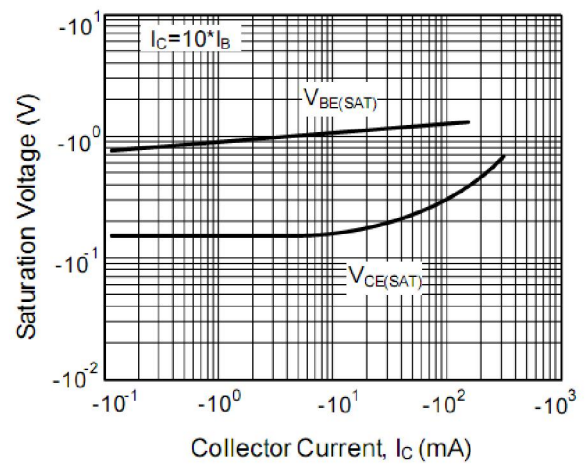


Figure 2. Saturation Voltage

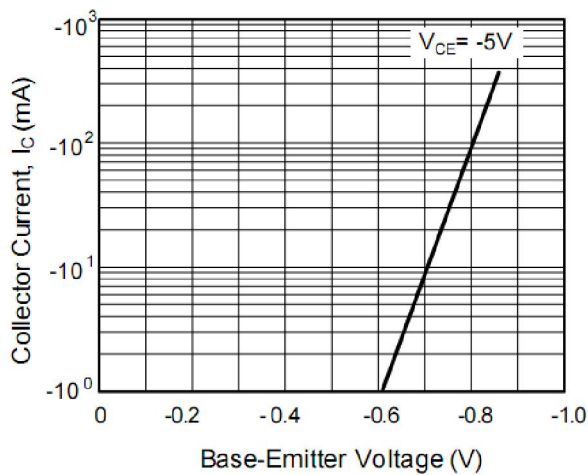


Figure 3. Base-Emitter on Voltage

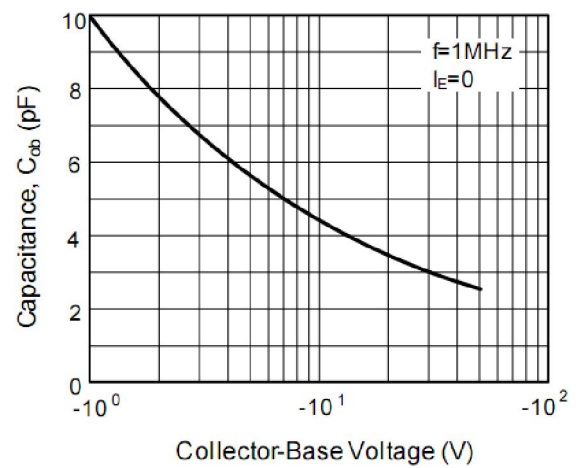


Figure 4. Collector Output Capacitance

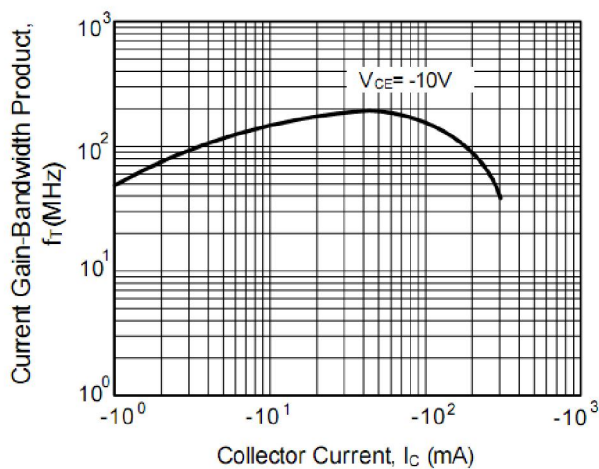


Figure 5. Current Gain-Bandwidth Product

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-223	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton
	Tape/Reel, 13" reel	2500pcs/Reel	5000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-223

Dlm	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.80	0.059	0.071
A1	0.00	0.10	0.000	0.004
A2	1.50	1.70	0.059	0.067
b	0.65	0.75	0.026	0.030
c	0.20	0.30	0.008	0.012
D	6.40	6.60	0.252	0.260
D1	2.90	3.10	0.114	0.122
E	3.30	3.70	0.130	0.146
E1	6.85	7.15	0.270	0.281
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	1.65	1.85	0.065	0.073
L1	0.90	1.15	0.035	0.045

The recommended mounting pad size

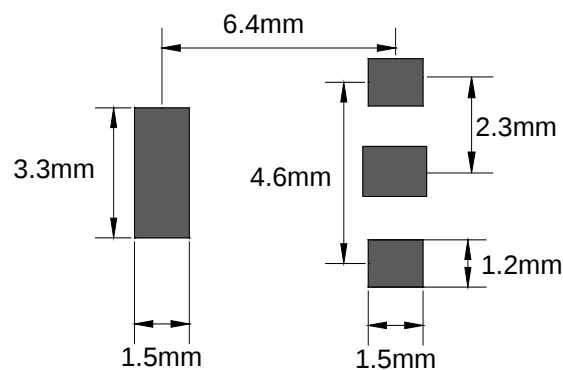

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.