

Trench Schottky Barrier Rectifiers

Reverse Voltage - 50V


Forward Current - 30A

FEATURES

- ◆The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆Guardring for overvoltage protection
- ◆Low forward voltage
- ◆High forward surge current capability
- ◆High temperature soldering guaranteed 260°C/10 seconds at terminals

MECHANICAL DATA

- ◆Case : Molded plastic body
- ◆Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
- ◆Polarity : Polarity symbol marking on body
- ◆Mounting Position : Any
- ◆Weight : 0.072 ounce, 2.05 grams

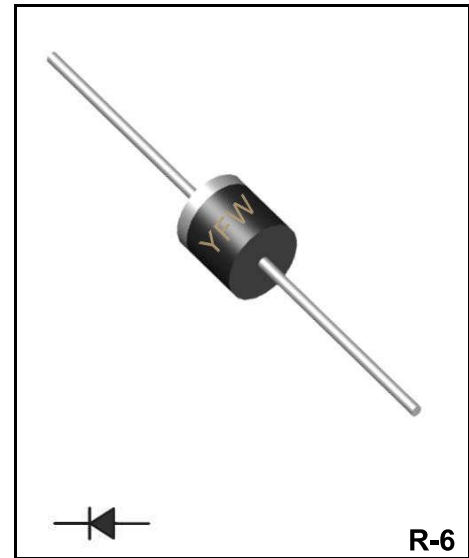

Maximum Ratings (Ta=25°C unless otherwise specified)

Parameter	Symbols	30SQ050	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	V
Maximum RMS voltage	V_{RMS}	35	V
Maximum DC blocking voltage	V_{DC}	50	V
Maximum average forward rectified current at $T_L=110^{\circ}C$	$I_{(AV)}$	30.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	400	A
Typical thermal resistance	R_{qJA} R_{qJL}	25 10	$^{\circ}C/W$
Operating junction temperature range	T_J	-55 to +150	$^{\circ}C$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbols	TYPE	MAX	UNITS
Maximum instantaneous forward voltage at 30.0A	V_F	0.52	0.55	V
Maximum DC reverse current $T_A=25^{\circ}C$	I_R	50	200	μA
Cat rated DC blocking voltage $T_A=100^{\circ}C$		5	20	mA

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

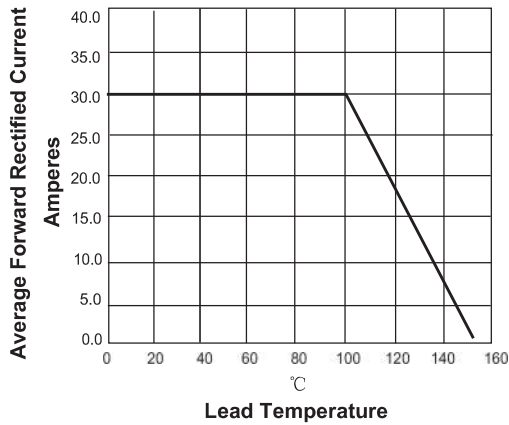


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

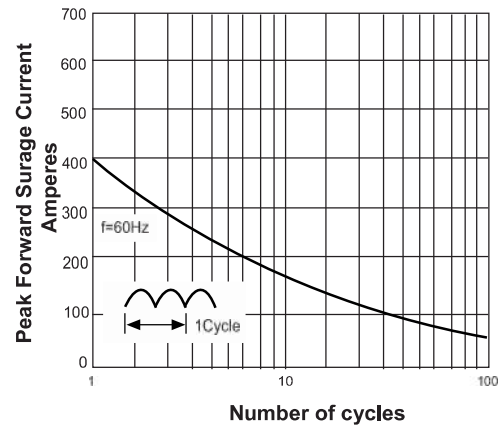


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS


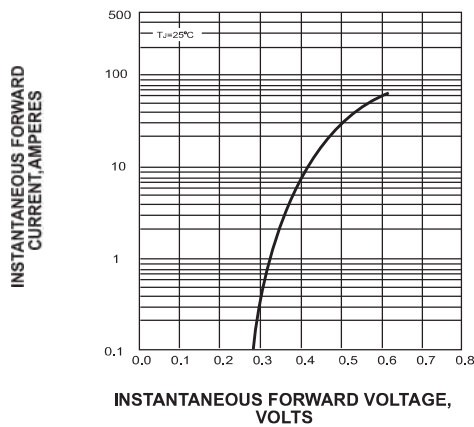


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

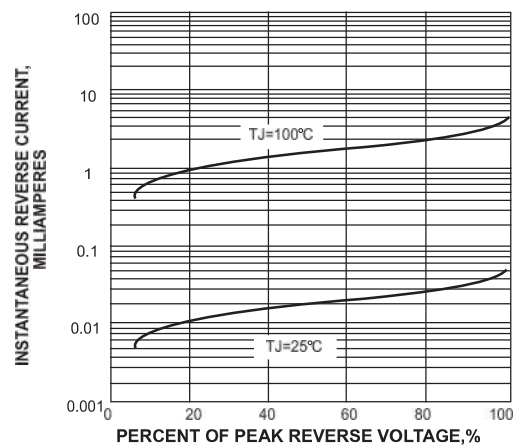

Ordering information

Package	Packing Description	Packing Quantity
R-6	ammo pack	500PCS/Inner Box 5000PCS/Carton

Package Dimensions

R-6

Dim.	Millimeter(mm)		INCHES	
	Min.	Max.	Min.	Max.
A	8.60	9.10	0.340	0.360
B	8.60	9.10	0.340	0.360
C	1.20	1.30	0.048	0.052
D	25.40	-	1.00	-

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.