


STANDARD CAPACITANCE TVS ARRAY

Features

- ◆ESD protection > 40kV
- ◆500Watts Peak Pulse Power per (tp=8/20us)
- ◆Working voltage: 24V
- ◆Low clamping voltage
- ◆Unidirectional & bidirectional configurations
- ◆IEC COMPATIBILITY(EN61000-4)
 - IEC61000-4-2(ESD) ±15kV(air), ±8kV(contact)
 - IEC61000-4-4(EFT) 40A(5/50ns)
 - IEC61000-4-5(Surge):24a,8.20us-level 2(Line-Ground)& Level 3(Line-Line)

Mechanical Data

- ◆SOT-23 Package
- ◆Flammability Rating: UL 94V-0
- ◆High temperature soldering guaranteed: 260°C/10s

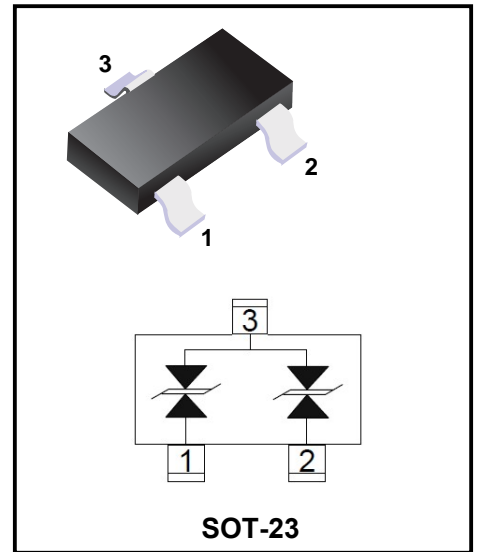

Marking Code	
SM24C	C24

ABSOLUTE MACIMUM RATING




Parameters	Symbol	Value	Unit
Peak Pulse Power (8/20us)	P _{PP}	500	W
Operati ng temperature	T _{OPT}	-55-+150	°C
Storage temperature range	T _{STG}	-55-+150	°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

PART NUMBER (Note 1)	DEVICE MARKING	VRWM (V) (max.)	VB (V) (min.)	IT (mA)	Vc@1A (V) (max.)	Vc (V) (max.) (@A)		IR (uA) (max.)	CT (pF) (max.)
SM24C	C24	24	26.0	1	43	49	12	1	63

ELECTRICAL CHARACTERISTICS CURVE

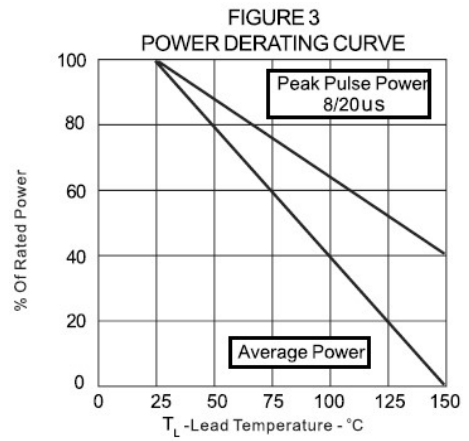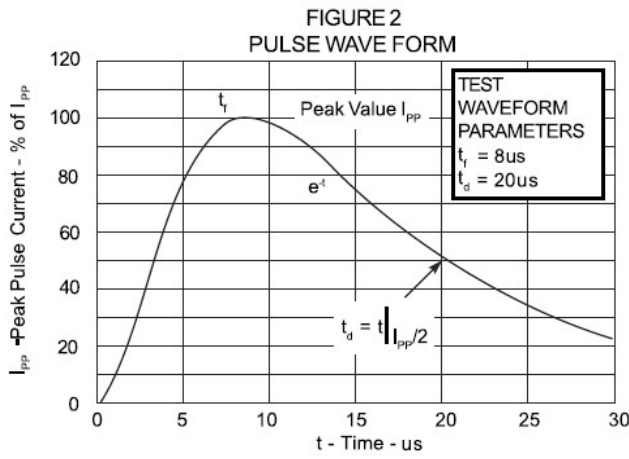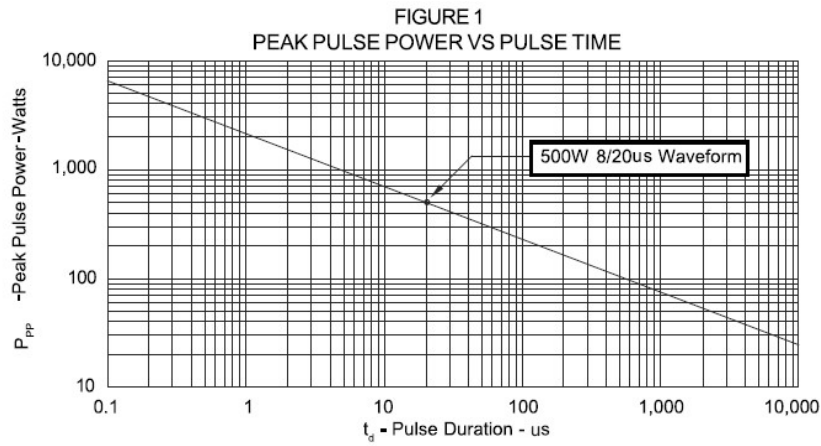

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-23	Tape/Reel,7"reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-23

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.15	35	45
A1	0.1		3.9	
bp	0.38	0.48	15	19
C	0.09	0.15	3.54	5.9
D	2.8	3.0	110	118
E	1.2	1.4	47	55
E	1.9		75	
E1	0.95		37	
HE	2.1	2.55	83	100
Lp	0.15	0.45	5.9	18
Q	0.45	0.55	18	22
v	0.2		7.9	
W	0.1		4	

The recommended mounting pad size

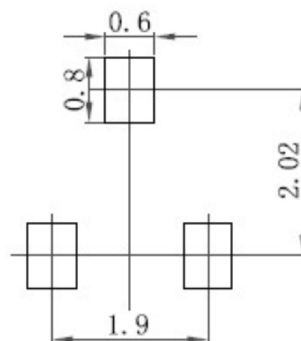

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.