

Fast recovery high voltage diodes

Reverse Voltage –10KV to 12KV


Forward Current –5mA

FEATURES

- ◆Supersmall size
- ◆High reliability
- ◆High speed switching
- ◆Epoxy meets UL94V-0 flammability rating


MECHANICAL DATA

- ◆Case: Molded Plastic Body
- ◆Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201 class 1A whisker test.

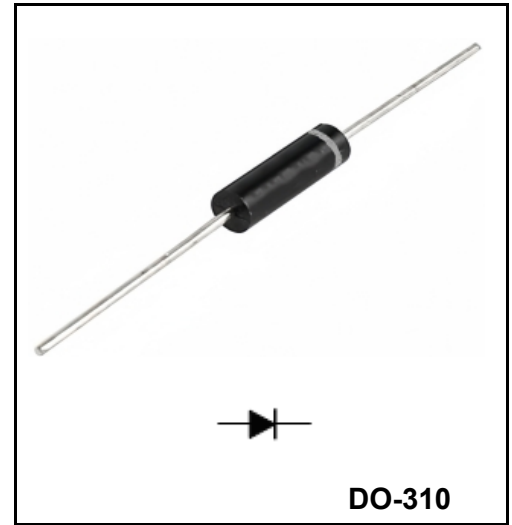


Parameter		Symbols	2CL72T	2CL73T	Units
Repetitive peak reverse voltage		V_{RRM}	10	12	KV
Non-Repetitive peak reverse voltage		V_{RMS}	12	15	KV
Average forward current	60Hz half-sine wave, Resistance load, $T_a=25^{\circ}C$	$I_{F(AV)}$	5		mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1 cycle, $T_a=25^{\circ}C$	I_{FSM}	0.5		A
Peak forward voltage	$I_{FM}=10mA$	V_{FM}	42	48	V
Peak reverse current $V_{RM}=V_{RRM}$	$T_a=25^{\circ}C$	I_{RRM}	2		μA
	$T_a=100^{\circ}C$		5		
Reverse recovery time	$I_F=2mA, I_{RM}=4mA$	T_{rr}	0.08		μS
Operating ambient temperature		T_a	-40~+125		$^{\circ}C$
Storage Temperature Range		T_{stg}	-40~+150		$^{\circ}C$
Virtual junction temperature		$T_{(vj)}$	125		$^{\circ}C$

Typical characteristics

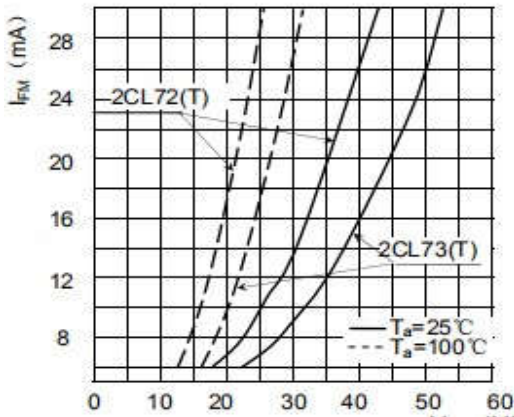


V_{FM} (V)

Forward Characteristics

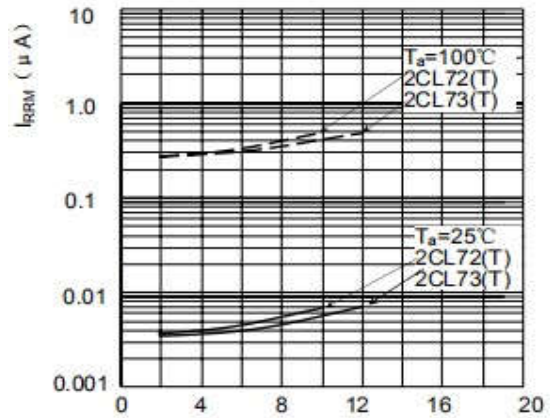


V_{RM} (kV)

Reverse Characteristics

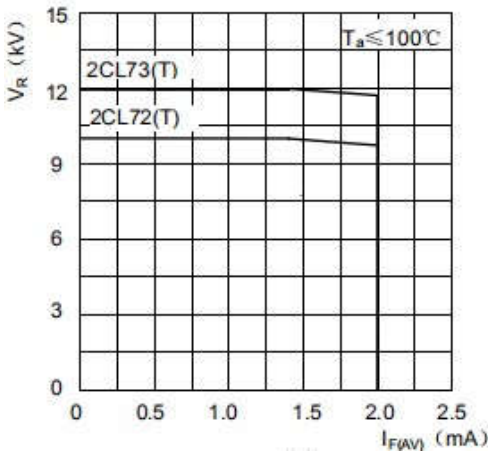

V_R — I_F (AV)


V_R — I_F (AV) Curve

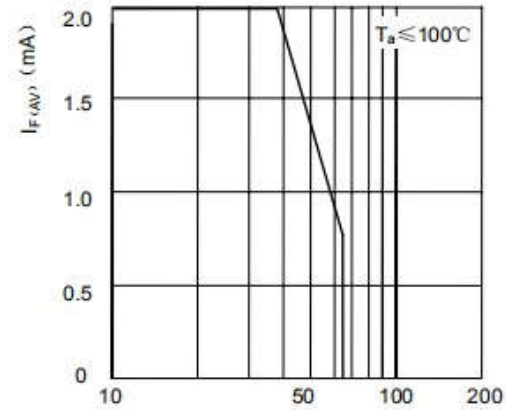


f_H (kHz)

I_F (AV) — f_H

I_F (AV) — f_H Curve

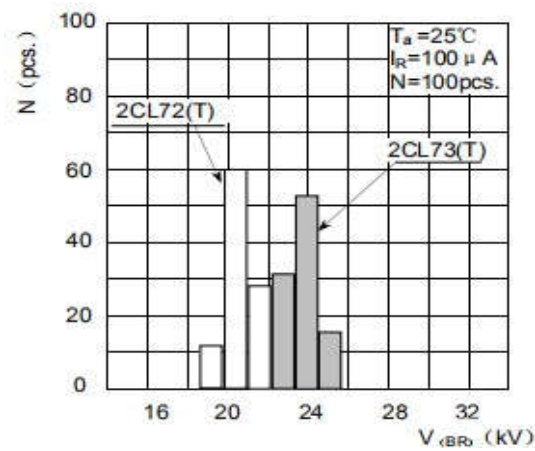

Breakdown voltage Distribution

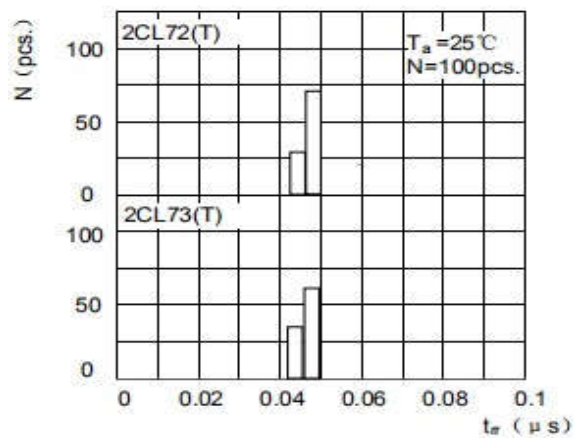


Reverse Recovery Time Distribution

Ordering information

Package	Packing Description	Packing Quantity
DO-310	ammo pack	5000PCS/Inner Box 50000PCS/Carton

Package Dimensions(Millimeter(mm))

DO-310

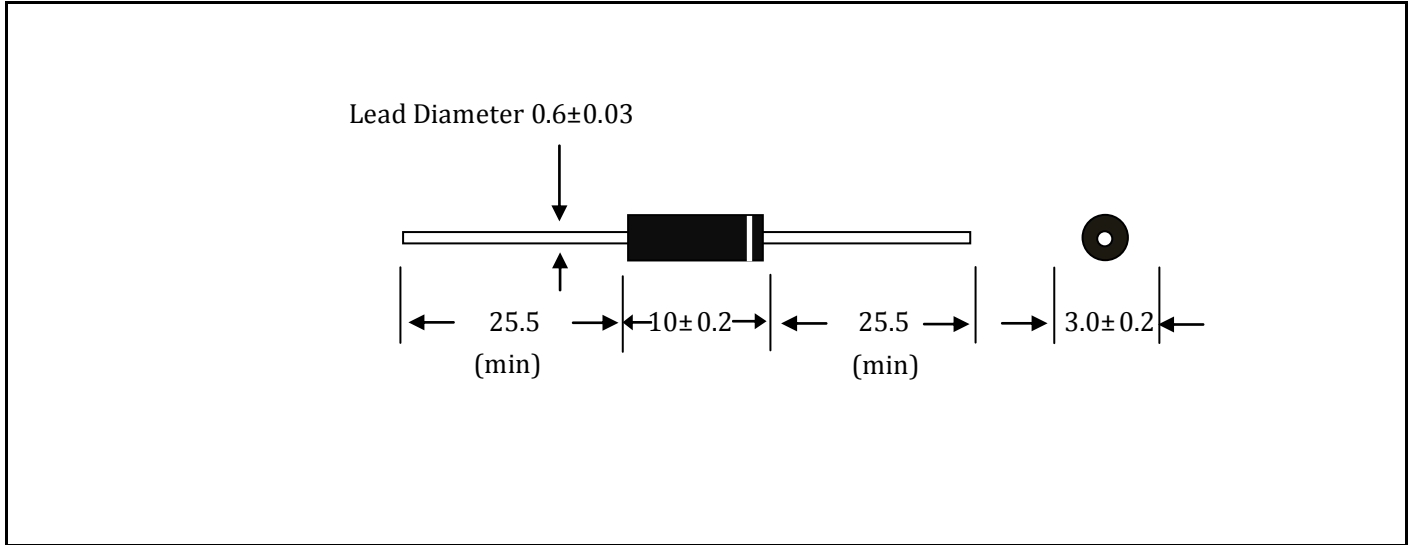

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.