

## Standard Surface Mounted Rectifiers

Reverse Voltage - 1600 to 2000 V

Forward Current - 1.0 A

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Idea for printed circuit board
- ◆ Glass passivated Junction chip
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

### MECHANICAL DATA


- ◆ Case : Molded plastic body
- ◆ Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
- ◆ Polarity : Polarity symbol marking on body
- ◆ Mounting Position : Any
- ◆ Weight : 0.0014 ounce, 0.038 grams

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	SM513F	SM516F	SM520F	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	1600	1800	2000	V
Maximum RMS voltage	$V_{RMS}$	1120	1260	1400	V
Maximum DC Blocking Voltage	$V_{DC}$	1600	1800	2000	V
Maximum Average Forward Rectified Current at $T_L = 100^\circ\text{C}$	$I_{(AV)}$	1.0			A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load	$I_{FSM}$	30.0			A
Maximum Instantaneous Forward Voltage at 1.0 A	$V_F$	1.10			V
Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	$I_R$	10 500			uA
Typical junction capacitance (Note1)	$C_J$	18.0			pF
Typical Thermal Resistance	$R_{\theta JA}$	70			°C/W
Operating Junction Temperature Range	$T_J$	-55 ~ +150			°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150			°C

### Pinning

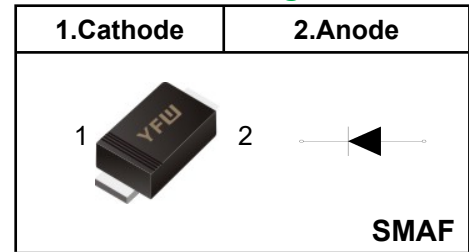


### Marking Code


SM513F	YFW SM513F
SM516F	YFW SM516F
SM520F	YFW SM520F

**Ratings And Characteristic Curves**


**FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT**

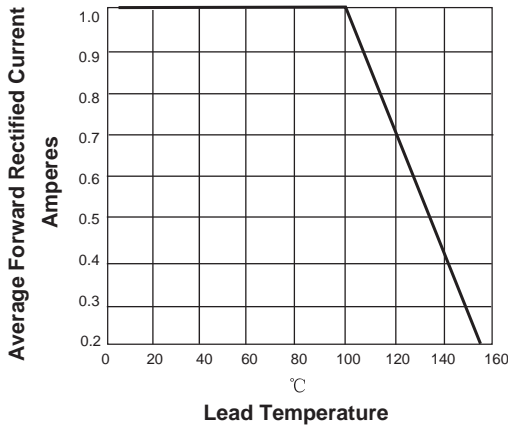


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG**

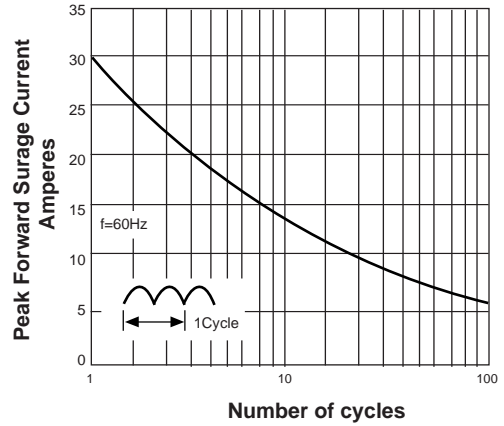


**FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS**

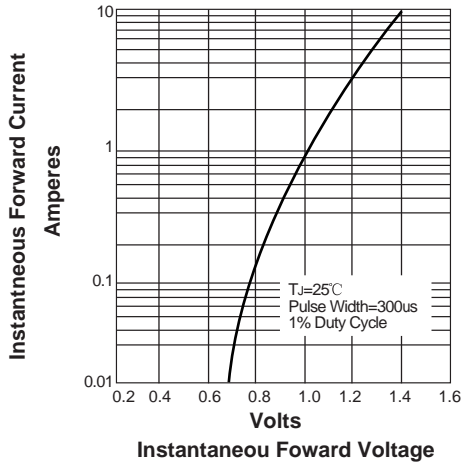

**FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

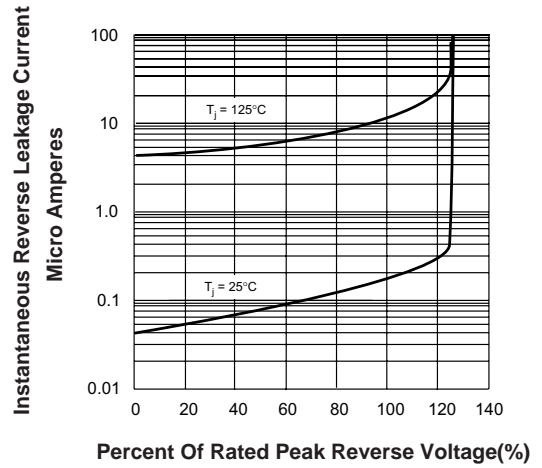

**Marking Diagram**

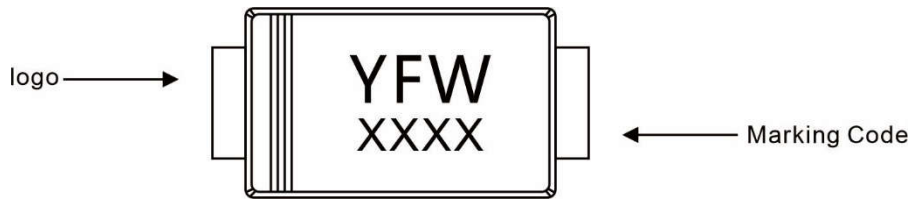

**Ordering information**


Package	Packing Description	Packing Quantity
SMAF	Tape/Reel,7"reel	3000PCS/Reel 90000PCS/Carton

**Package Dimensions**

**SMAF**

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.1	35	43
C	0.12	0.20	4.7	7.9
D	3.3	3.7	130	146
E	2.4	2.7	94	106
e	1.3	1.6	51	63
g	0.8	1.2	31	47
HE	4.4	4.9	173	193
∠	7°			

**The recommended mounting pad size**

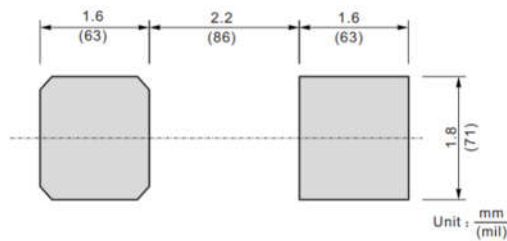

## Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.