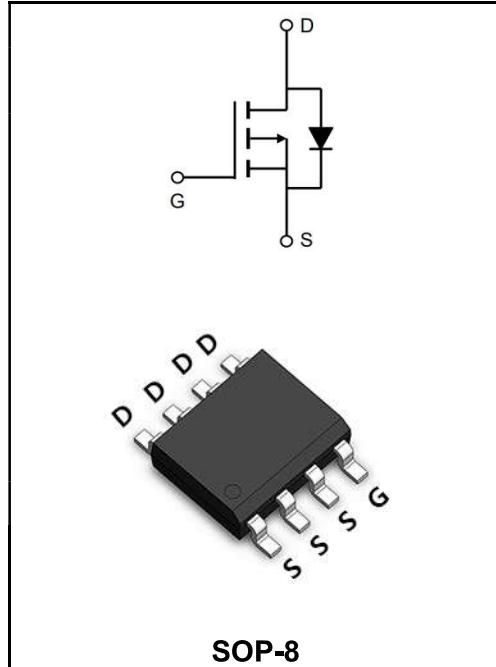


-40V P-CHANNEL ENHANCEMENT MODE MOSFET
MAIN CHARACTERISTICS

I_D	-6A
V_{DSS}	-40V
$R_{DS(on)-typ}(@V_{GS}=-10V)$	< 65mΩ (Type: 60 mΩ)


Application

- ◆ Battery protection
- ◆ Load switch
- ◆ Uninterruptible power supply

Maximum Ratings at $T_c=25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbols	Value	Units
Drain-Source Voltage	V_{DS}	-40	V
Gate - Source Voltage	V_{GS}	± 20	V
Continuous Drain Current, $V_{GS} @ -10V^1$ @ $T_A=25^\circ\text{C}$	I_D	-6	A
Continuous Drain Current, $V_{GS} @ -10V^1$ @ $T_A=70^\circ\text{C}$	I_D	-3	A
Pulsed Drain Current ²	I_{DM}	-16	A
Single Pulse Avalanche Energy ³	E_{AS}	21	mJ
Avalanche Current	I_{AS}	-20.5	A
Total Power Dissipation ⁴ @ $T_A=25^\circ\text{C}$	P_D	1.5	W
Storage Temperature Range	T_{STG}	-55 to +150	°C
Operating Junction Temperature Range	T_J	-55 to +150	°C
Thermal Resistance Junction-Ambient ¹	$R_{\theta JA}$	85	°C/W
Thermal Resistance Junction to Case ¹	$R_{\theta JC}$	50	°C/W

Maximum Ratings at T_c=25°C unless otherwise specified

Characteristics	Test Condition	Symbols	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	BV _{DSS}	-40	-46	-	V
BVDSS Temperature Coefficient	Reference to 25°C , I _D =-1mA	ΔBV _{DSS/ΔTJ}	-	-0.018	-	V/°C
Static Drain-Source On-Resistance ²	V _{GS} =-4.5V, I _D =-3A	R _{DS(ON)}	-	60	65	mΩ
	V _{GS} =-2.5V, I _D =-2A		-	85	100	
Gate -Threshold Voltage	V _{DS} =V _{GS} , I _D =-250uA	V _{GS(th)}	-1.0	-1.5	-2.5	V
V _{GS(th)} Temperature Coefficient		ΔV _{GS(th)}	-	2.5	-	mV/°C
Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25°C	I _{DSS}	-	-	-1	μA
	V _{DS} =-24V , V _{GS} =0V , T _J =55°C		-	-	-5	
Gate -Source Leakage Current	V _{GS} =±20V, V _{DS} =0V	I _{GSS}	-	-	±100	nA
Forward Transconductance	V _{DS} =-5V , I _D =-3A	g _{fs}	-	5.8	-	S
Total Gate Charge(-4.5V)	V _{DS} =-32V V _{GS} =-4.5V I _D =-3A	Q _g	-	6.4	-	nC
Gate-Source Charge		Q _{gs}	-	2.1	-	
Gate-Drain Charge		Q _{gd}	-	2.5	-	
Turn-on delay time	V _{DD} =-20V V _{GS} =-4.5V I _D = -3A R _G =3.3Ω	t _{d(on)}	-	4.2	-	ns
Rise Time		T _r	-	23	-	
Turn-Off Delay Time		t _{d(OFF)}	-	26.8	-	
Fall Time		t _f	-	20.6	-	
Input Capacitance	V _{DS} =-15V V _{GS} =0V f=1MHz	C _{iss}	-	620	-	pF
Output Capacitance		C _{oss}	-	65	-	
Reverse Transfer Capacitance		C _{rss}	-	53	-	
Continuous Source Current ^{1,4}	V _G =V _D =0V , Force Current	I _s	-	-	-3.2	A
Pulsed Source Current ^{2,4}		I _{SM}	-	-	-16.1	A
Diode Forward Voltage ²	V _{GS} =0V , I _S =-1A , T _J =25°C	V _{SD}	-	-	-1	V

Note :

1. The data tested by surface mounted on a 1 inch FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
3. The power dissipation is limited by 150°C junction temperature
- 4.. The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

Ratings and Characteristic Curves

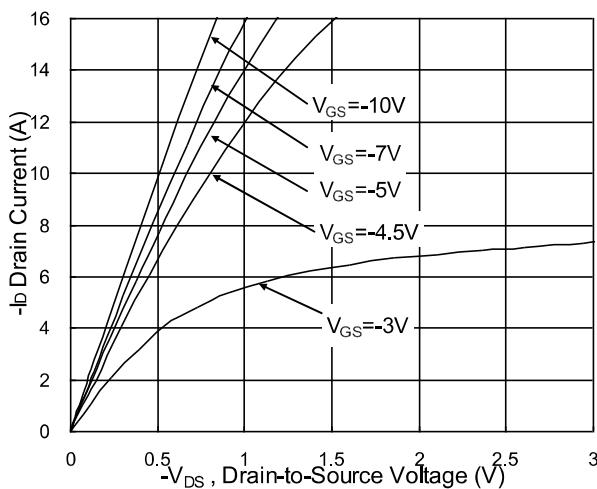


Fig.1 Typical Output Characteristics

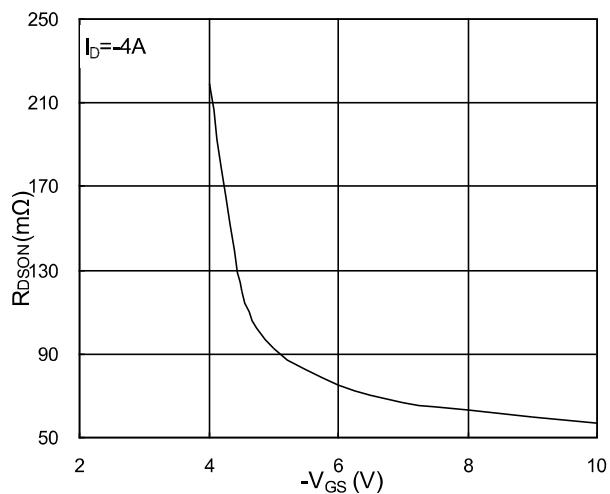


Fig.2 On-Resistance v.s Gate-Source

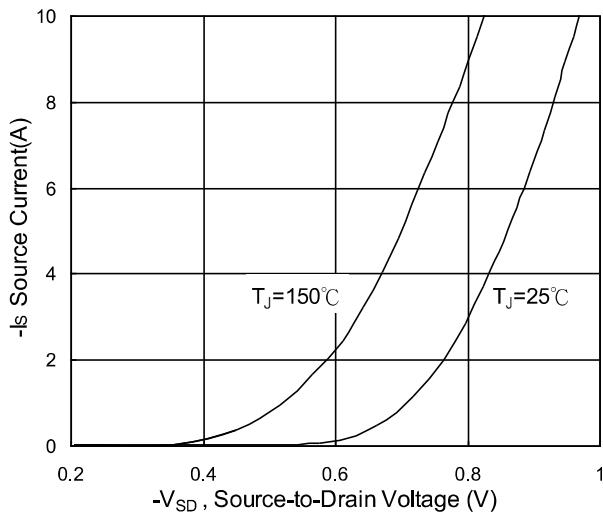


Fig.3 Forward Characteristics Of Reverse

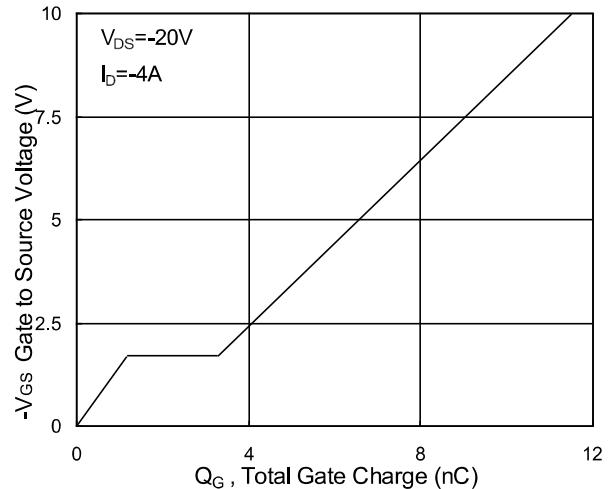


Fig.4 Gate Charge Characteristics

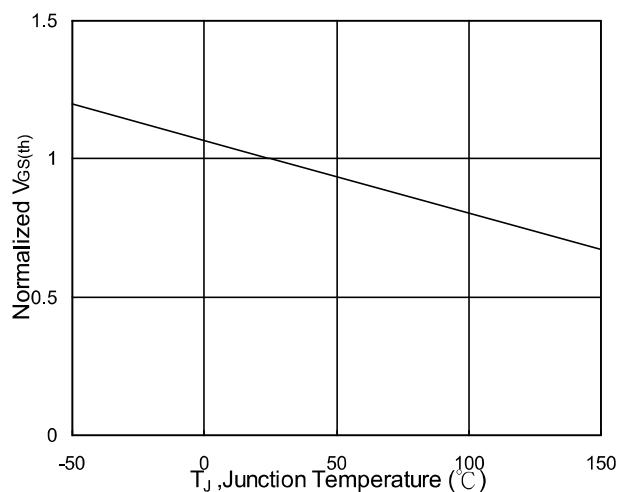


Fig.5 Normalized $V_{GS(th)}$ v.s T_J







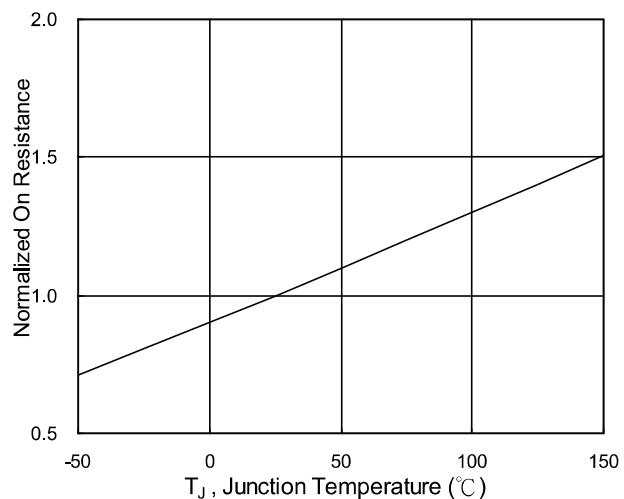


Fig.6 Normalized R_{DSON} v.s T_J

Ratings and Characteristic Curves

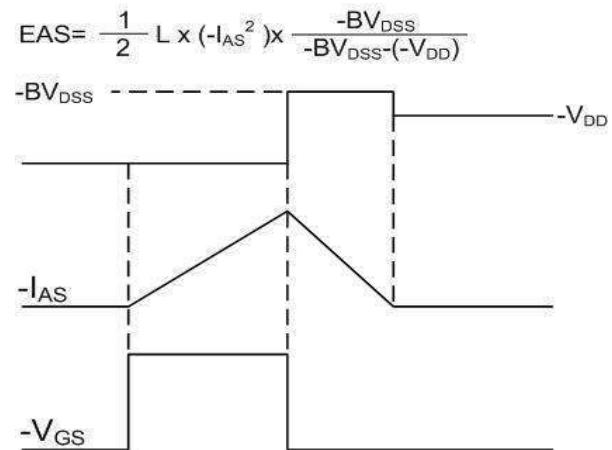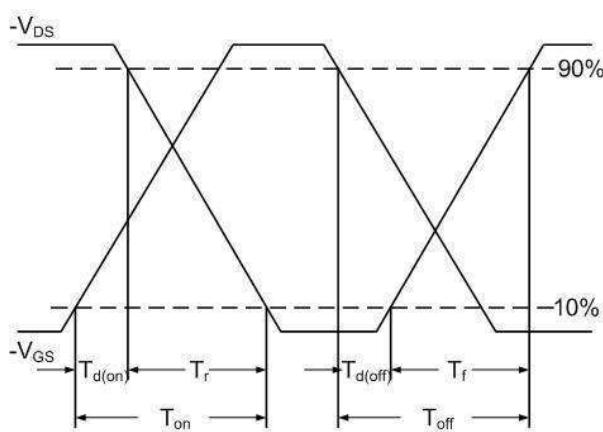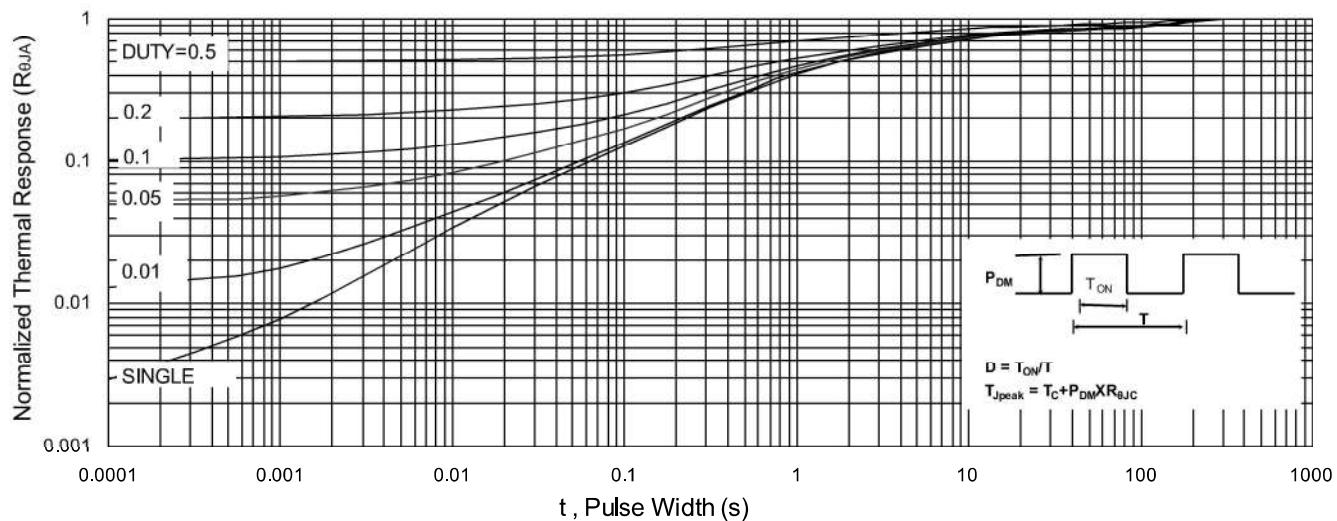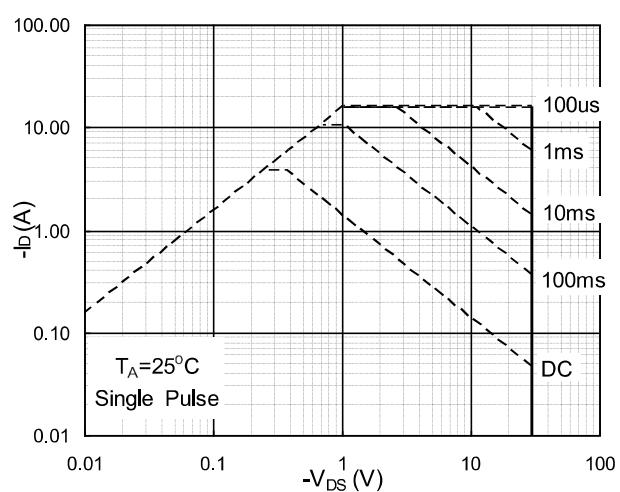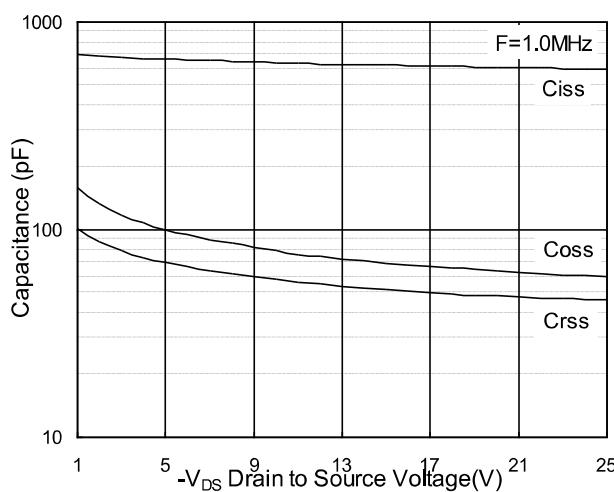

Marking Diagram

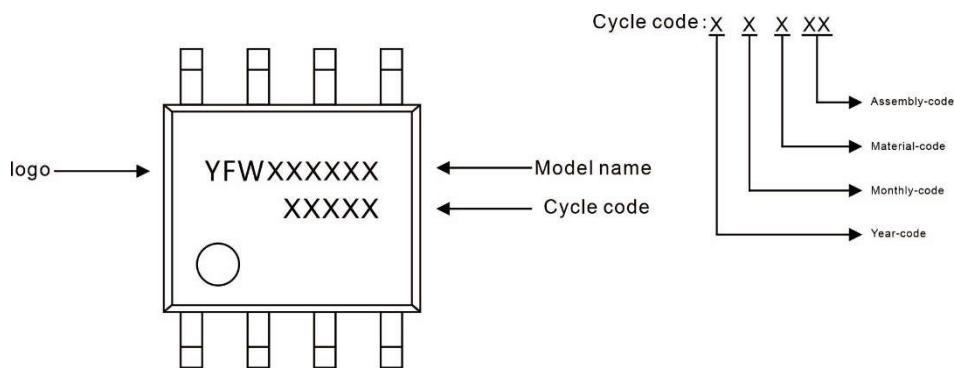


Ordering information

Package	Packing Description	Packing Quantity
SOP-8	Tape/Reel,13"reel	3000PCS/Reel 30000PCS/Carton


Package Dimensions

SOP-8

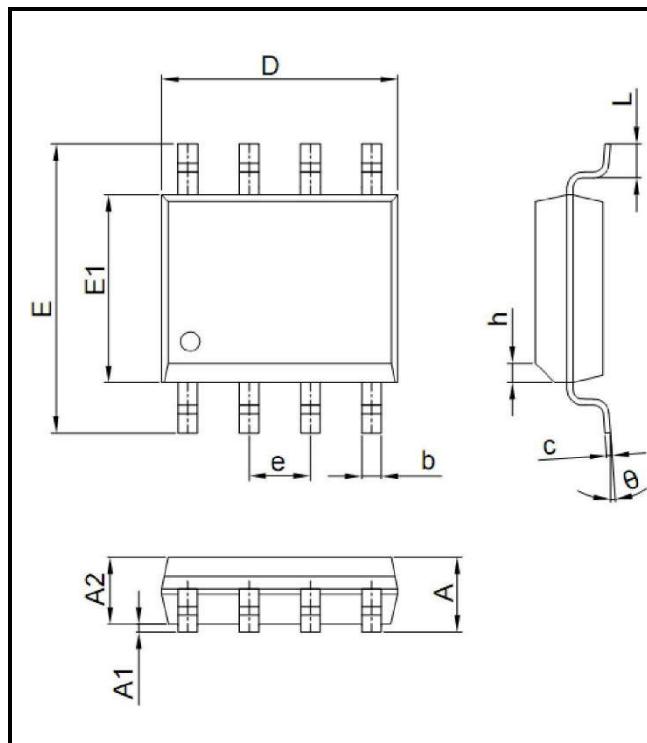

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.35	1.50	0.053	0.059
b	0.35	0.55	0.014	0.022
c	0.15	0.25	0.006	0.010
D	4.80	5.00	0.189	0.197
D1	3.10	3.50	0.122	0.138
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
E2	2.20	2.60	0.087	0.102
e	1.27 (BSC)		0.050 (BSC)	
L	0.40	1.27	0.016	0.050
θ	0°	8°	0°	8°

The recommended mounting pad size

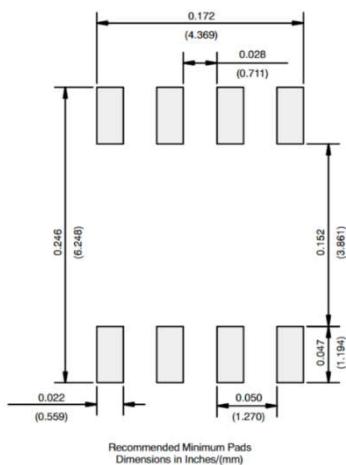

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.