

Transient Voltage Suppressor power 1500watts


FEATURES

- ◆Excellent clamping capability
- ◆Low leakage current
- ◆High surge capability
- ◆Glass passivated chip
- ◆Epoxy resin package
- ◆Built-in strain relief
- ◆Will not fatigue
- ◆RoHS Compliant
- ◆Fast response time:
◆typically less than 1.0ps from 0 Volts to VBR min

MECHANICAL DATA

- ◆Case: DO-214AB/SMC
- ◆Terminals: Solderable per MIL-STD-750, Method 2026
- ◆Approx. Weight: 0.22g /0.0077oz

Pinning

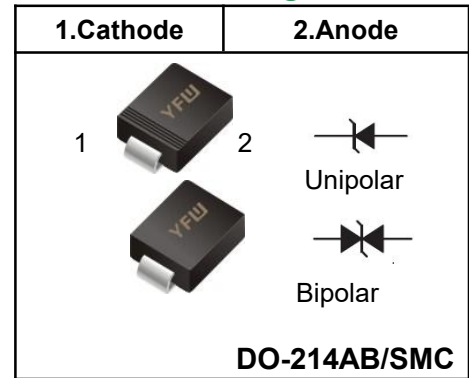

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation(Note1)(Note2)	P_{PPM}	1500	W
Steady State Power Dissipation(Note3)	P_D	6.5	W
Peak Forward Surge Current(Note4)	I_{FSM}	200	A
Maximum Instantaneous Forward Voltage at 100A(Note5)	V_{FM}	3.5/5	V
Typical Thermal Resistance Junction to Lead	R_{θJL}	15	°C/W
Typical Thermal Resistance Junction to Ambient	R_{θJA}	75	°C/W
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Notes1: Non-repetitive current pulse , 10/1000us Waveform.

Notes2: Mounted on copper pad area of 8×8mm to each terminal.

Notes3: Infinite HeatSink at T_L=50°C

Notes4: Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 perminute maximum.

Notes5: For UnidirectionalOnly, V_{FM}<3.5V for V_{BR}≤200V and V_{FM}<5.0V for V_{BR}≥201V.

Electrical Characteristics (TA=25°C unless otherwise)

Part Number (Uni)	Part Number (Bi)	Marking		Reverse Stand off Voltage V_R (Volts)	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{pp} (V)	Maximum Peak Pulse Current I_{pp} (A)	Maximum Reverse Leakage I_R @ V_R (pA)	Agency Approval
		Uni	Bi		Min	Max					
1.5SMC6.8A	1.5SMC6.8CA	YFW 6V8A	YFW 6V8C	5.8	6.45	7.14	10	10.5	144.8	1000	X
1.5SMC7.5A	1.5SMC7.5CA	YFW 7V5A	YFW 7V5C	6.4	7.13	7.88	10	11.3	134.5	500	X
1.5SMC8.2A	1.5SMC8.2CA	YFW 8V2A	YFW 8V2C	7.02	7.79	8.61	10	12.1	125.6	200	X
1.5SMC9.1A	1.5SMC9.1CA	YFW 9V1A	YFW 9V1C	7.78	8.65	9.5	1	13.4	113.4	50	X
1.5SMC10A	1.5SMC10CA	YFW 10A	YFW 10C	8.55	9.5	10.5	1	14.5	104.8	10	X
1.5SMC11A	1.5SMC11CA	YFW 11A	YFW 11C	9.4	10.5	11.6	1	15.6	97.4	5	X
1.5SMC12A	1.5SMC12CA	YFW 12A	YFW 12C	10.2	11.4	12.6	1	16.7	91	5	X
1.5SMC13A	1.5SMC13CA	YFW 13A	YFW 13C	11.1	12.4	13.7	1	18.2	83.5	1	X
1.5SMC15A	1.5SMC15CA	YFW 15A	YFW 15C	12.8	14.3	15.8	1	21.2	71.7	1	X
1.5SMC16A	1.5SMC16CA	YFW 16A	YFW 16C	13.6	15.2	16.8	1	22.5	67.6	1	X
1.5SMC18A	1.5SMC18CA	YFW 18A	YFW 18C	15.3	17.1	18.9	1	25.2	60.3	1	X
1.5SMC20A	1.5SMC20CA	YFW 20A	YFW 20C	17.1	19	21	1	27.7	54.9	1	X
1.5SMC22A	1.5SMC22CA	YFW 22A	YFW 22C	18.8	20.9	23.1	1	30.6	49.7	1	X
1.5SMC24A	1.5SMC24CA	YFW 24A	YFW 24C	20.5	22.8	25.2	1	33.2	45.8	1	X
1.5SMC27A	1.5SMC27CA	YFW 27A	YFW 27C	23.1	25.7	28.4	1	37.5	40.5	1	X
1.5SMC30A	1.5SMC30CA	YFW 30A	YFW 30C	25.6	28.5	31.5	1	41.4	36.7	1	X
1.5SMC33A	1.5SMC33CA	YFW 33A	YFW 33C	28.2	31.4	34.7	1	45.7	33.3	1	X
1.5SMC36A	1.5SMC36CA	YFW 36A	YFW 36C	30.8	34.2	37.8	1	49.9	30.5	1	X
1.5SMC39A	1.5SMC39CA	YFW 39A	YFW 39C	33.3	37.1	41	1	53.9	28.2	1	X
1.5SMC43A	1.5SMC43CA	YFW 43A	YFW 43C	36.8	40.9	45.2	1	59.3	25.6	1	X
1.5SMC47A	1.5SMC47CA	YFW 47A	YFW 47C	40.2	44.7	49.4	1	64.8	23.5	1	X
1.5SMC51A	1.5SMC51CA	YFW 51A	YFW 51C	43.6	48.5	53.6	1	70.1	21.7	1	X
1.5SMC56A	1.5SMC56CA	YFW 56A	YFW 56C	47.80	53.2	58.8	1	77.0	19.7	1	X
1.5SMC62A	1.5SMC62CA	YFW 62A	YFW 62C	53	58.9	65.1	1	85	17.9	1	X
1.5SMC68A	1.5SMC68CA	YFW 68A	YFW 68C	58.1	64.6	71.4	1	92	16.5	1	X
1.5SMC75A	1.5SMC75CA	YFW 75A	YFW 75C	64.1	71.3	78.8	1	103	14.8	1	X
1.5SMC82A	1.5SMC82CA	YFW 82A	YFW 82C	70.1	77.9	86.1	1	113	13.5	1	X
1.5SMC91A	1.5SMC91CA	YFW 91A	YFW 91C	77.8	86.5	95.5	1	125	12.2	1	X
1.5SMC100A	1.5SMC100CA	YFW 100A	YFW 100C	85.5	95	105	1	137	11.1	1	X
1.5SMC110A	1.5SMC110CA	YFW 110A	YFW 110C	94	105	116	1	152	10	1	X
1.5SMC120A	1.5SMC120CA	YFW 120A	YFW 120C	102	114	126	1	165	9.2	1	X
1.5SMC130A	1.5SMC130CA	YFW 130A	YFW 130C	111	124	137	1	179	8.5	1	X
1.5SMC150A	1.5SMC150CA	YFW 150A	YFW 150C	128	143	158	1	207.0	7.3	1	X
1.5SMC160A	1.5SMC160CA	YFW 160A	YFW 160C	136	152	168	1	219	6.9	1	X
1.5SMC170A	1.5SMC170CA	YFW 170A	YFW 170C	145	162	179	1	234	6.5	1	X
1.5SMC180A	1.5SMC180CA	YFW 180A	YFW 180C	154	171	189	1	246	6.2	1	X
1.5SMC200A	1.5SMC200CA	YFW 200A	YFW 200C	171	190	210	1	274	5.5	1	X
1.5SMC220A	1.5SMC220CA	YFW 220A	YFW 220C	185	209	231	1	328	4.6	1	X
1.5SMC250A	1.5SMC250CA	YFW 250A	YFW 250C	214	237	263	1	344	4.4	1	X
1.5SMC300A	1.5SMC300CA	YFW 300A	YFW 300C	256	285	315	1	414	3.7	1	X
1.5SMC350A*	1.5SMC350CA*	YFW 350A	YFW 350C	300	332	368	1	482	4.2	1	X
1.5SMC400A*	1.5SMC400CA*	YFW 400A	YFW 400C	342	380	420	1	548	3.7	1	X
1.5SMC440A*	1.5SMC440CA*	YFW 440A	YFW 440C	376	418	462	1	602	3.4	1	X
1.5SMC480A*	1.5SMC480CA*	YFW 480A	YFW 480C	408	456	504	1	658	3.1	1	X

1.5SMC510A*	1.5SMC510CA*	YFW 510A	YFW 510C	434	485	535	1	698	2.9	1	X
1.5SMC530A*	1.5SMC530CA*	YFW 530A	YFW 530C	451	503.5	556.5	1	725	2.8	1	X
1.5SMC540A*	1.5SMC540CA*	YFW 540A	YFW 540C	460	513	567	1	740	2.8	1	X
1.5SMC550A*	1.5SMC550CA*	YFW 550A	YFW 550C	468	522.5	577.5	1	760	2.7	1	X
1.5SMC600A*	1.5SMC600CA*	YFW 600A	YFW 600C	512	570	630	1	828	2.5	1	-

For bidirectional type having VR of 10 volts and less, the IR limit is double.

For parts without A , the VBR is $\pm 10\%$ and Vc is 5% higher than with A parts, the parts without A are currently available, but not recommended for new designs. The parts with A are preferred.

For stack-die parts, use * to label the part number.

FIG1: Peak Pulse Power Rating Curve

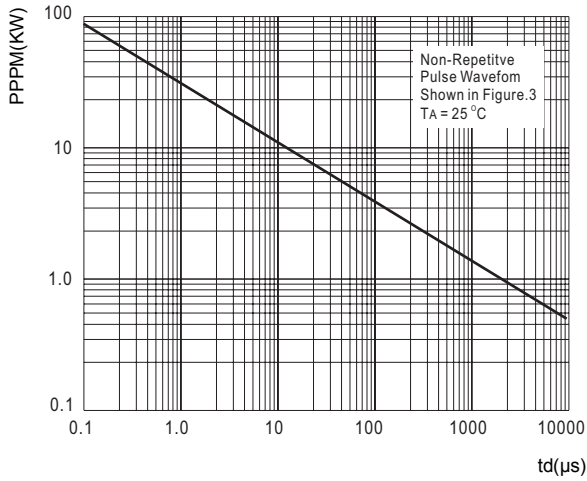


FIG2: Pulse Power or Current vs. Initial Junction Temperature

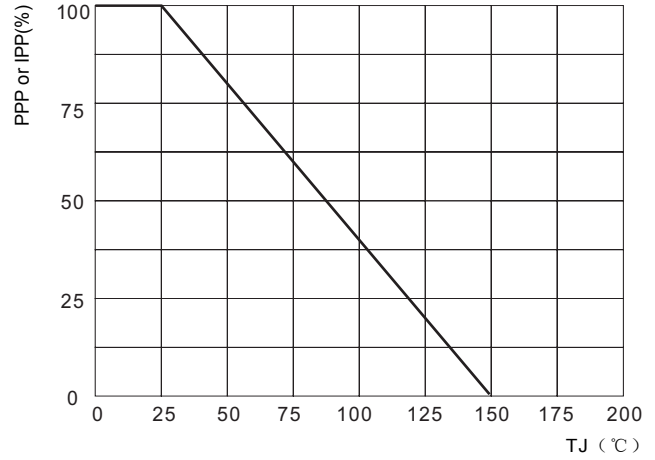


FIG3: Pulse Waveform

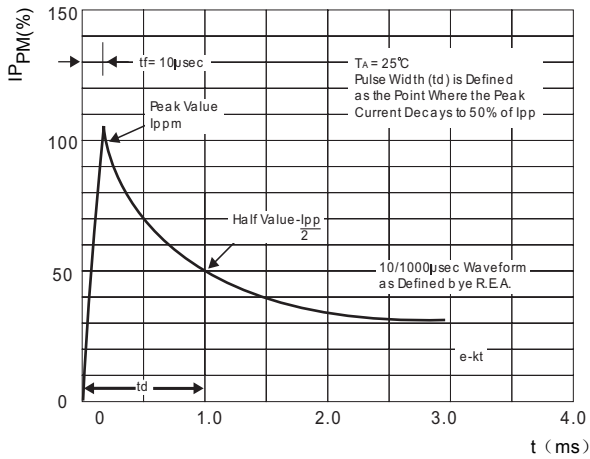


FIG4: Typical Transient Thermal Impedance

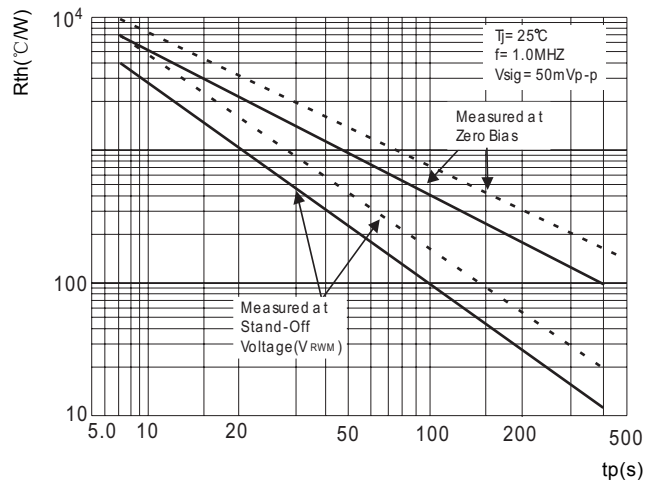


FIG5: Maximum Non-Repetitive Surge Current


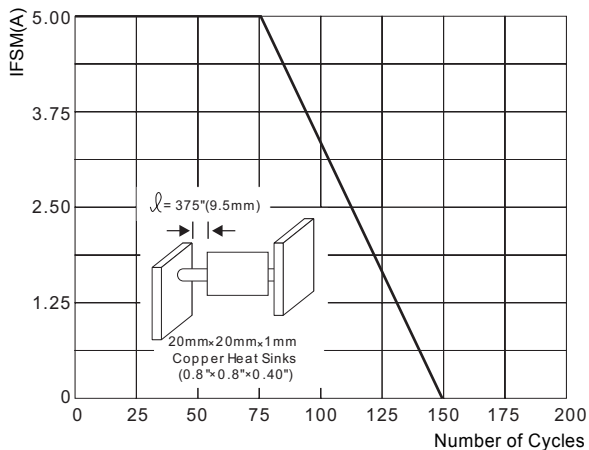


FIG6: Steady State Power Dissipation



Marking Diagram

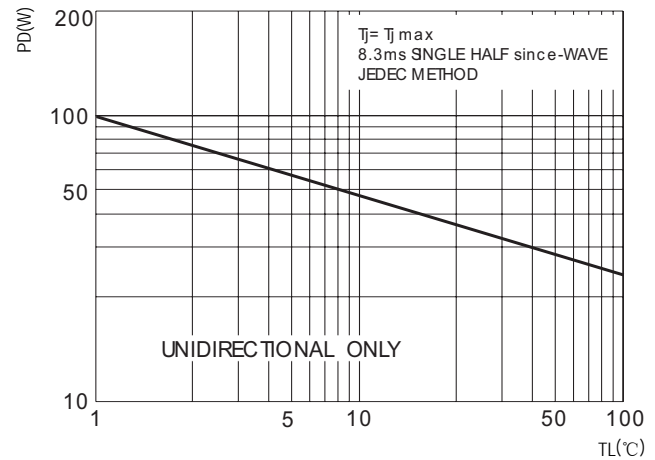

Ordering information


Package	Packing Description	Packing Quantity
DO-214AB SMC	Tape/Reel, 13" reel	3000PCS/Reel 30000PCS/Carton

Package Dimensions

DO-214AB SMC

Dim.	Millimeter(mm)		mil	
	Min.	Max.	Min.	Max.
A	2.00	2.62	79	103
E	6.5	7.0	256	276
D	5.6	6.2	220	244
E ₁	7.6	8.0	299	315
A ₁	0.05	0.21	2.0	8.3
C	0.15	0.31	5.9	12
L	0.9	1.6	35	63
b	2.75	3.25	108	128

The recommended mounting pad size

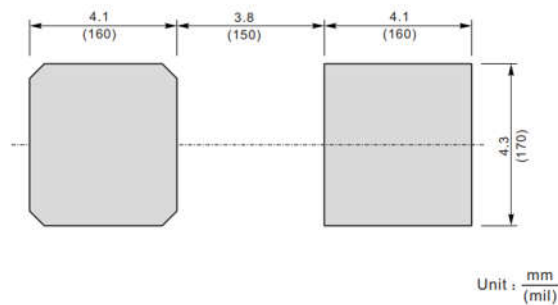

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.