

650V N-Channel Enhancement Mode Power MOSFET

MAIN CHARACTERISTICS

I_D	2A
V_{DS}	650V
$R_{DS(on)-typ}(@V_{GS}=10V)$	$<4.5\Omega$ (Typ:4.0Ω)

FEATURES


- ♦Fast Switching
- ♦Low ON Resistance
- ♦Low Gate Charge
- ♦100% Single Pulse avalanche energy Test

APPLICATIONS

- ♦Power switch circuit of adaptor and charger.

MECHANICAL DATA

- ♦Case:TO-220F/AF TO-220AB/AT TO-263/AS
TO-252/AD TO-251S/AMJ
- ♦Mounting Position: Any
- ♦Molded Plastic: UL Flammability Classification Rating 94V-0
- ♦Lead free in compliance with EU RoHS 2011/65/EU directive
- ♦Solder bath temperature 275°C maximum,10s per JESD 22-B106

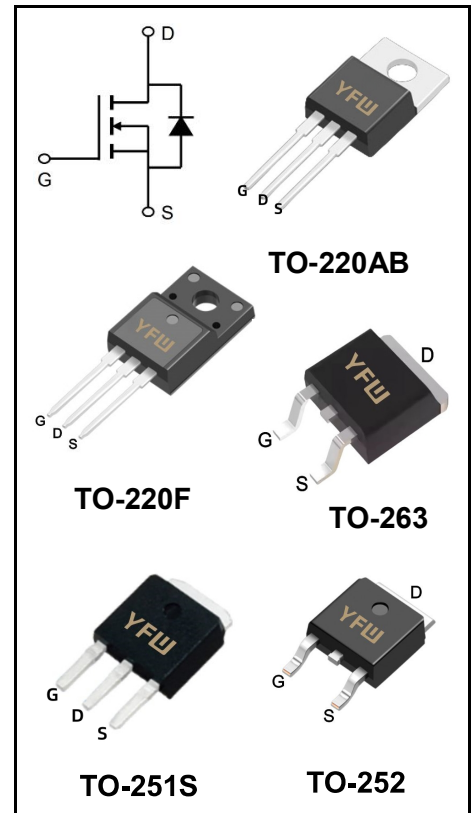

Maximum Ratings at $T_c=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value		Unit
		TO-220F	TO-220AT/TO-263 /TO-252/TO-251S	
Drain-Source Voltage	V_{DS}	650		V
Gate-Source Voltage	V_{GS}	± 30		V
Continue Drain Current	I_D	2		A
Pulsed Drain Current (Note1)	I_{DM}	8		A
Power Dissipation	P_D	25	35	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	65		mJ
Operating Temperature Range	T_J	150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-50 to +150		$^\circ\text{C}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	5.24	3.57	$^\circ\text{C/W}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	62.5	$^\circ\text{C/W}$







Note1:Pulse test: 300 μs pulse width, 2 % duty cycle

Maximum Ratings at Tc=25°C unless otherwise specified


Parameter	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$	BV_{DSS}	650	682	-	V
Drain-Source Leakage Current	$V_{DS} = 650\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 30\text{ V}, V_{DS} = 0\text{ V}$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10\text{ V}, I_D = 1\text{ A}$	$R_{DS(on)}$	-	4.0	4.5	Ω
Forward Transconductance	$V_{DS} = 15\text{ V}, I_D = 2\text{ A}$	g_{fs}	-	2.5	-	S
Input Capacitance	$V_{GS} = 0\text{ V},$ $V_{DS} = 2\text{ V},$ $f = 200\text{ KHz}$	C_{iss}	-	415	-	pF
Output Capacitance		C_{oss}	-	32	-	
Reverse Transfer Capacitance		C_{rss}	-	6	-	
Turn-on Delay Time(Note2)	$I_D = 2\text{ A},$ $V_{DD} = 325\text{ V}$ $R_G = 10\text{ }\Omega$	$t_{d(on)}$	-	8	-	ns
Rise Time(Note2)		T_r	-	6	-	
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	30	-	
Fall Time(Note2)		t_f	-	11	-	
Total Gate Charge(Note2)	$V_{DS} = 520\text{ V},$ $V_{GS} = 10\text{ V},$ $I_D = 2\text{ A}$	Q_g	-	10.8	-	nC
Gate to Source Charge(Note2)		Q_{gs}	-	1.5	-	
Gate to Drain Charge(Note2)		Q_{gd}	-	4	-	
Maximun Body-Diode Continuous Current		I_S	-	-	2	A
Maximun Body-Diode Pulsed Current(Note2)		I_{SM}	-	-	8	A
Drain-Source Diode Forward Voltage	$I_{SD} = 2\text{ A}$	V_{SD}	-	-	1.4	V
Body Diode Reverse Recovery Time	$I_{SD} = 2\text{ A}, V_{GS} = 0\text{ V},$ $dI_F / dt = 100\text{ A}/\mu\text{s}$	t_{rr}	-	430	-	ns
Body Diode Reverse Recovery Charge		Q_{rr}	-	1.1	-	nC

Note2:Pulse test: 300 μs pulse width, 2 % duty cycle

Ratings and Characteristic Curves

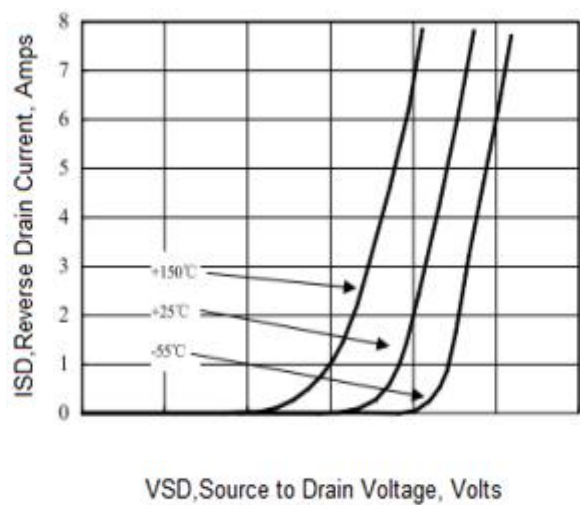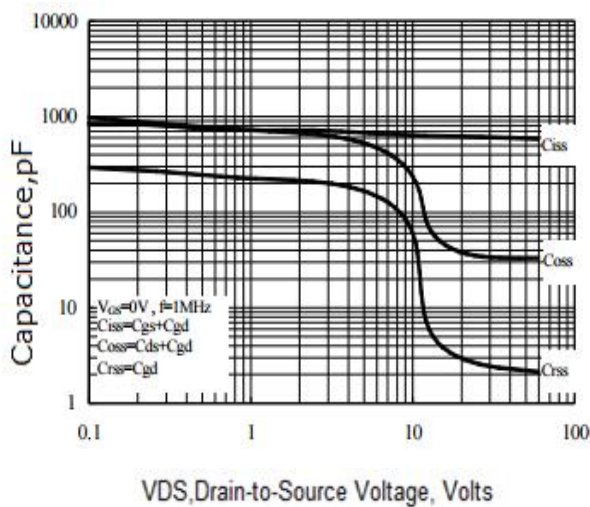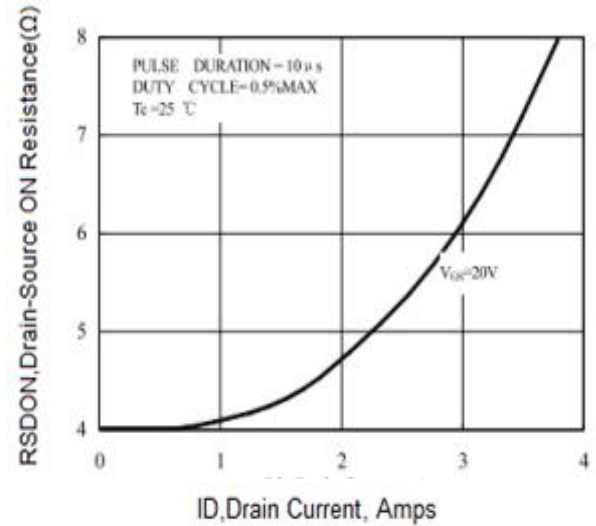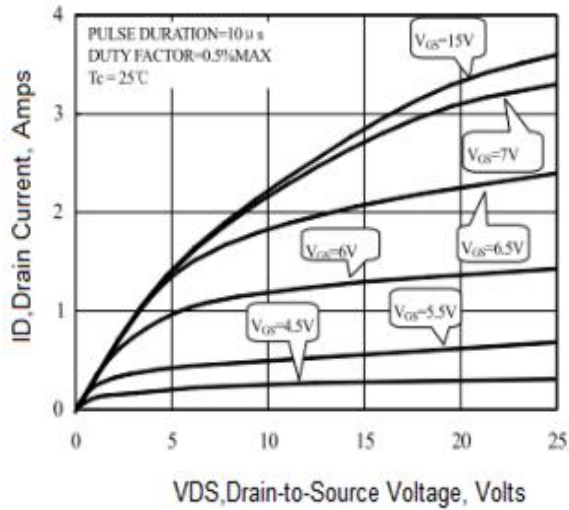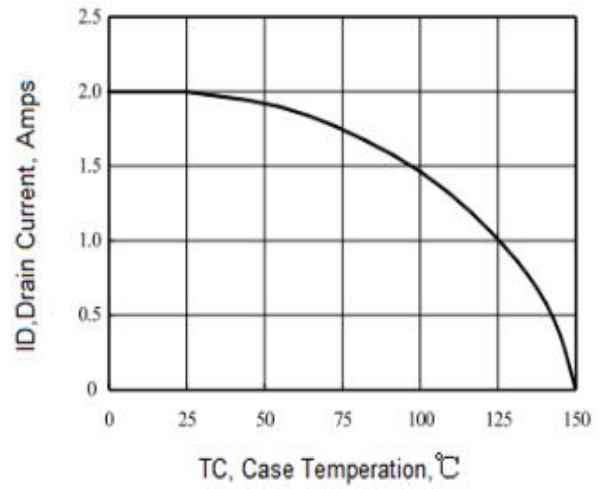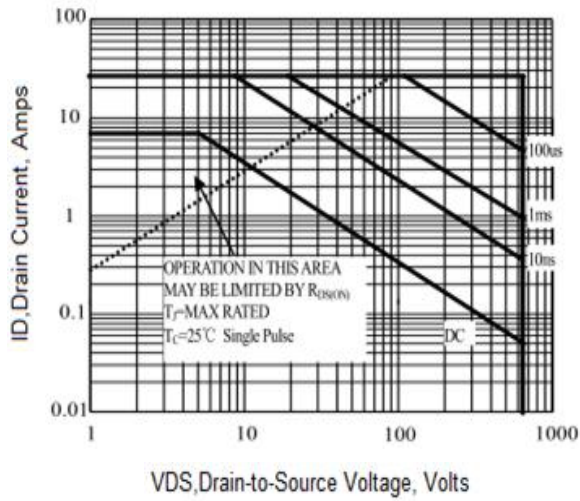

Marking Diagram

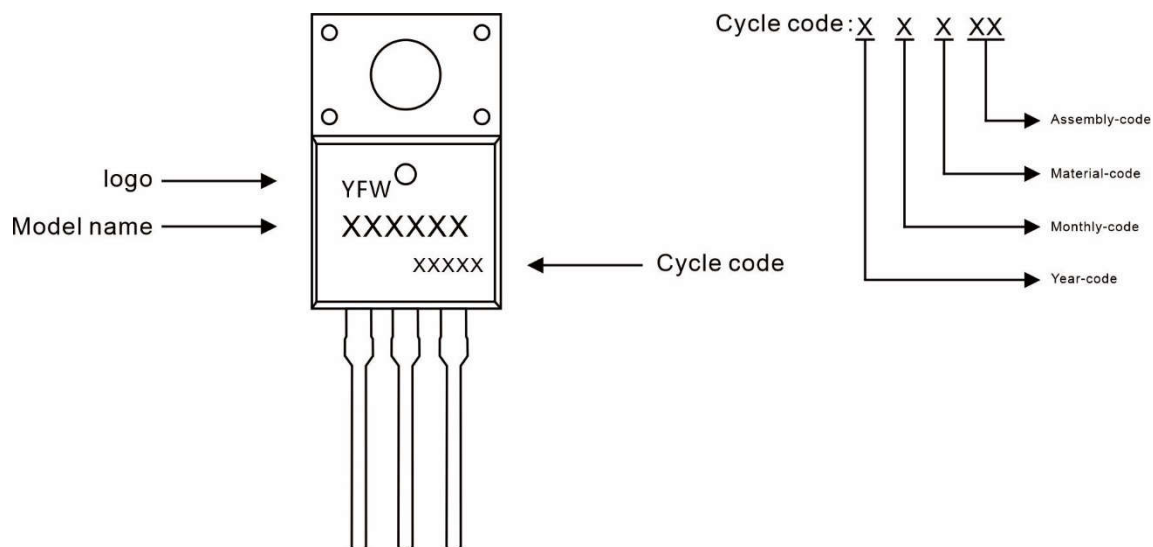

Ordering information


Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW2N65AF	TO-220F	0.06oz(1.74g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

Package Dimensions

TO-220F

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.66	2.86	0.105	0.113
b	0.75	0.85	0.030	0.033
b1	1.24	1.44	0.049	0.057
c	0.40	0.60	0.016	0.024
D	10.00	10.32	0.394	0.406
E	15.75	16.05	0.620	0.632
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	3.10	3.5	0.122	0.138
L	13.50	13.90	0.531	0.547
L1	2.90	3.30	0.114	0.130
Φ	3.10	3.30	0.122	0.130

Marking Diagram

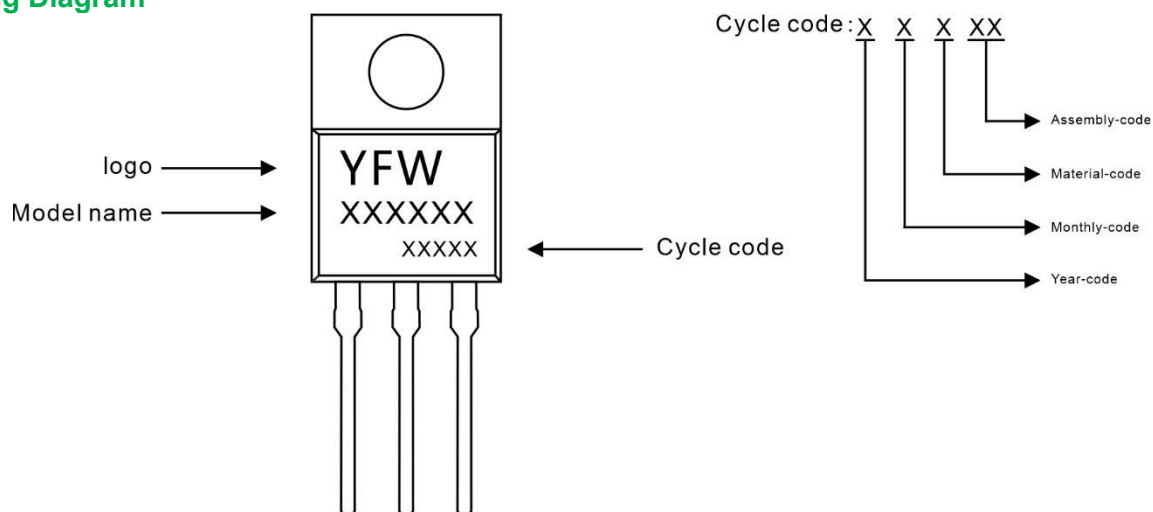

Ordering information


Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW2N65AT	TO-220AB	0.07oz(1.96g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

Package Dimensions

TO-220AB

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	2.52	2.82	0.099	0.111
b	0.71	0.91	0.028	0.036
b1	1.17	1.37	0.046	0.054
c	0.30	0.50	0.012	0.020
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
E1	12.00	12.50	0.472	0.492
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	2.60	2.80	0.102	0.110
L	13.20	13.80	0.520	0.543
L1	3.80	4.20	0.150	0.165
Φ	3.60	3.96	0.142	0.156

Marking Diagram

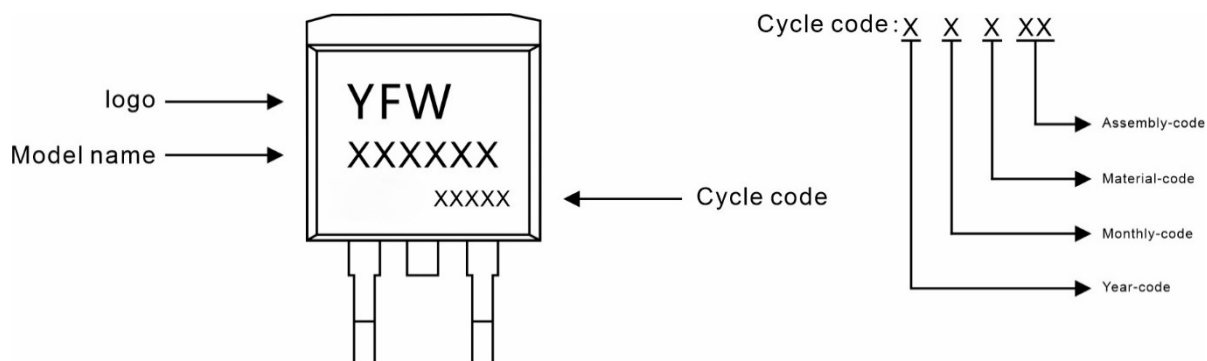

Ordering information


Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW2N65AS	TO-263	0.04oz(1.16g)	800pcs/reel	1600pcs/box 8000pcs/Carton

Package Dimensions

TO-263

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	0.00	0.15	0.000	0.006
A2	4.30	4.55	0.169	0.179
B	1.10	1.50	0.043	0.059
b	0.70	0.90	0.028	0.035
b1	1.20	1.50	0.047	0.059
c	0.30	0.60	0.012	0.024
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
L	15.00	15.30	0.591	0.602
L1	5.20	5.40	0.205	0.213
L2	2.40	2.60	0.094	0.102
L3	1.60	1.80	0.063	0.071

Marking Diagram

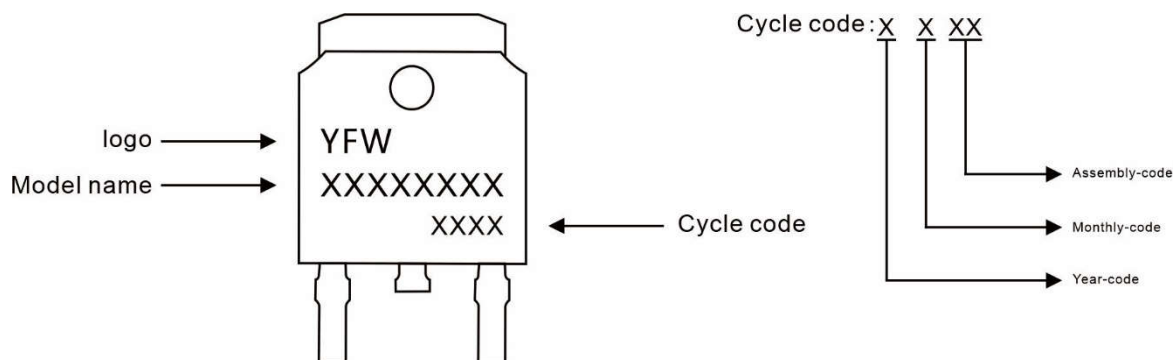

Ordering information


Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW2N65AD	TO-252	0.011oz(0.32g)	2500pcs/reel	5000pcs/box 25000pcs/Carton

Package Dimensions

TO-252

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.098
A1	0.00	0.12	0.000	0.005
A2	2.20	2.40	0.087	0.094
B	1.20	1.60	0.047	0.063
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.35	6.65	0.250	0.262
D1	5.20	5.40	0.205	0.213
E	5.40	5.70	0.213	0.224
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	10.00	11.00	0.393	0.433
L1	2.70	3.10	0.106	0.122
L2	1.40	1.80	0.055	0.071
L3	0.90	1.50	0.035	0.059

Marking Diagram

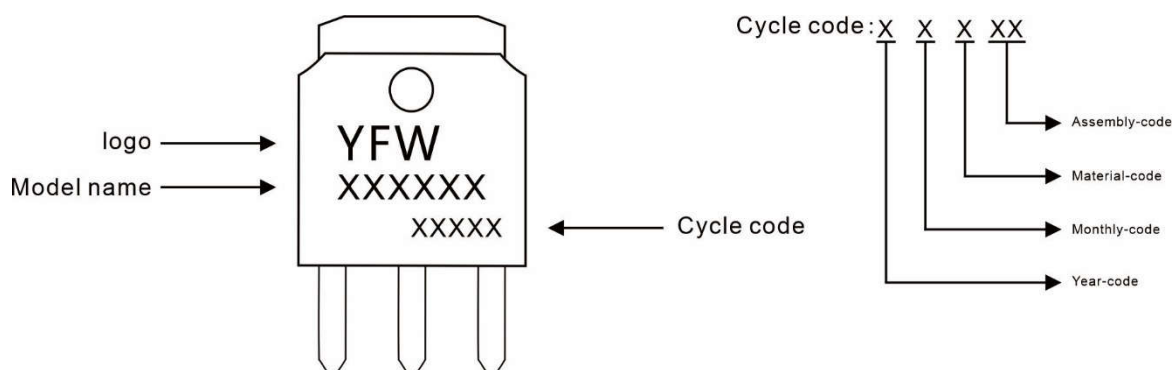

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW2N65AMJ	TO-251S	0.011oz(0.32g)	80pcs/tube	4000pcs/box 24000pcs/Carton

Package Dimensions

TO-251S

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.1	2.5	0.083	0.098
A1	6.3	6.9	0.248	0.271
A2	0.9	1.1	0.035	0.043
A3	TYP0.5		TYP0.019	
b	0.6	0.8	0.024	0.031
c	0.4	0.5	0.015	0.020
D	5.3	5.5	0.209	0.217
D2	3.65	4.05	0.144	0.159
E	5.8	6.4	0.228	0.252
E2	0.9	1.4	0.035	0.055
e	TYP2.29		TYP0.090	
e1	TYP4.58		TYP0.180	
L	3.7	4.3	0.146	0.169

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.