


NPN Silicon Epitaxial Planar Transistor

For low frequency power amplification

The transistor is subdivided into two groups, Q and R, according to its DC current gain.

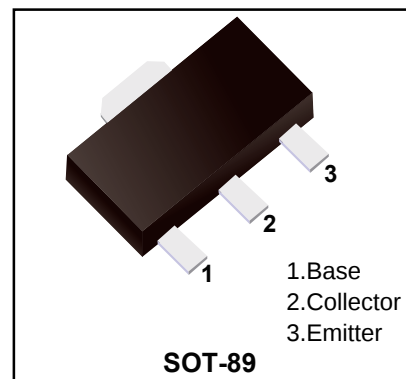

Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	20	V
Emitter to Base Voltage	V_{EBO}	7	V
Collector Current	I_C	5	A
Peak Collector Current	I_{CP}	8	A
Total power dissipation	P_{tot}	0.75	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{Stg}	- 55 to + 150	°C










Characteristics at Ta = 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 2\text{ V}$, $I_C = 0.5\text{ A}$ Current Gain Group Q R	h_{FE}	230	-	380	-
	h_{FE}	340	-	600	-
	h_{FE}	150	-	-	-
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	V_{CEO}	20	-	-	V
Emitter Base Breakdown Voltage at $I_E = 10\text{ }\mu\text{A}$	V_{EBO}	7	-	-	V
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	I_{CBO}	-	-	0.1	μA
Collector Cutoff Current at $V_{CE} = 10\text{ V}$	I_{CEO}	-	-	1	μA
Emitter Cutoff Current at $V_{EB} = 7\text{ V}$	I_{EBO}	-	-	0.1	μA
Collector Emitter Saturation Voltage at $I_C = 3\text{ A}$, $I_B = 0.1\text{ A}$	$V_{CE(sat)}$	-	-	1	V
Transition Frequency at $V_{CB} = 6\text{ V}$, $-I_E = 50\text{ mA}$, $f = 200\text{ MHz}$	f_T	-	150	-	MHz
Collector Output Capacitance at $V_{CB} = 20\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	-	50	pF

hFE Classification

Classification	2SD965SI-Q	2SD965SI-R
Range	230~380	340~600
Marking	965Q	965R

Typical Characteristics

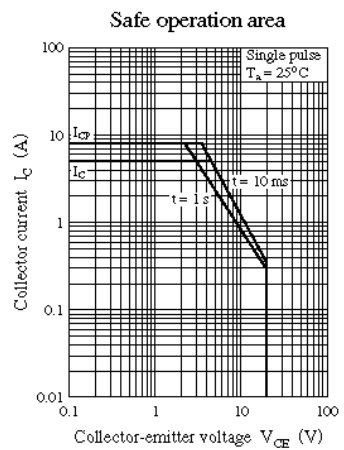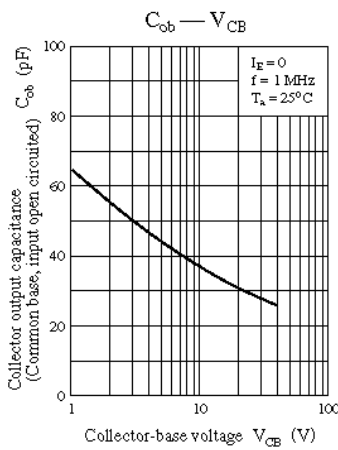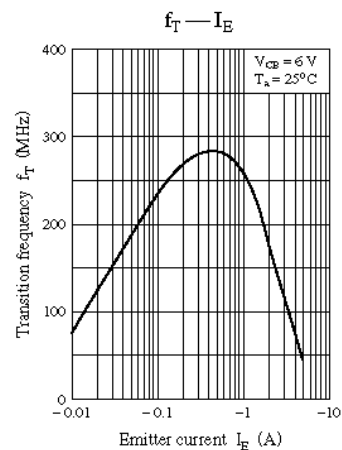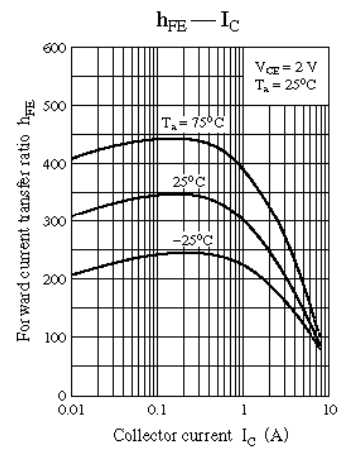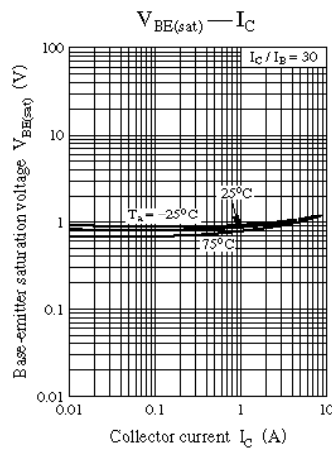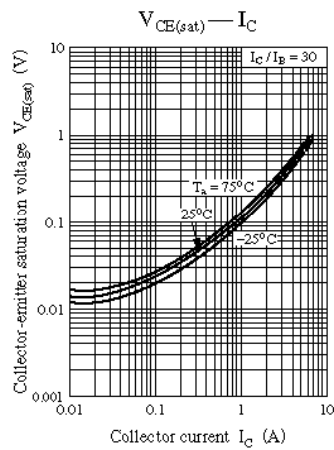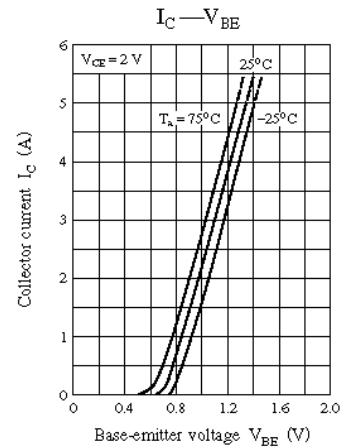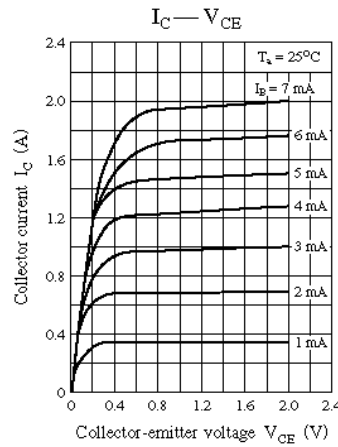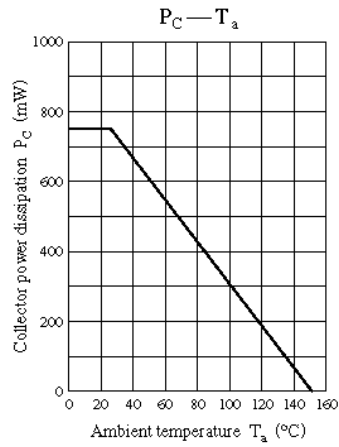

Ordering information

Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.